


CLOSURES AND
JOINERY




OCTOBER 2025

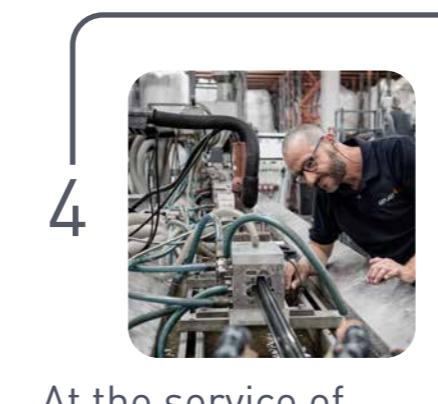

4

At the service of
your projects

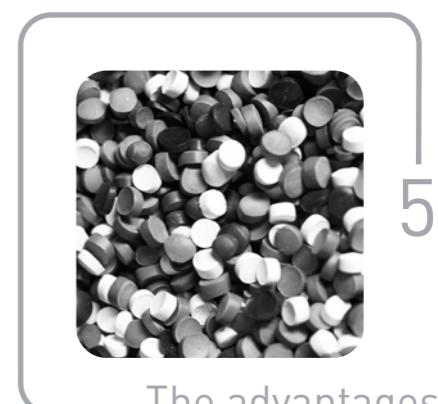


5

The advantages
of PVC




6

GEKO
Eco-designed by nature

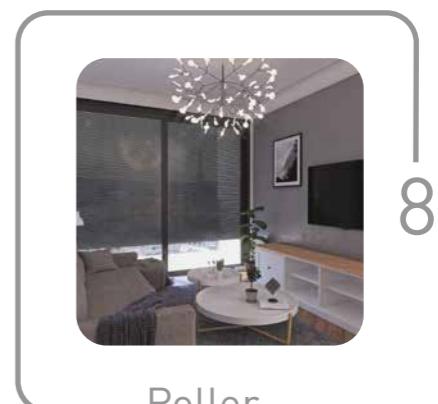

8

Roller
shutters

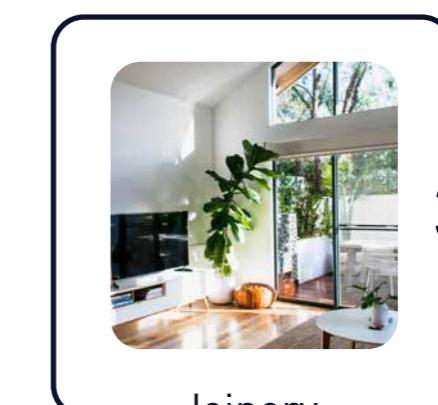

38

Joinery


At the service of your projects

For over 20 years, our team has been dedicated to your projects. Thanks to our expertise in the design and extrusion of profiles, we are able to offer you quality products, innovative and efficient solutions to meet all your expectations.

Geplast Building brings together the entire product range for building professionals in the field of joinery and closure.

Some of our PVC profiles are certified QB59 (mass-coloured finish profiles) and QB33 (profiles with plaxed finish) by the CSTB. For more information, please visit our website : www.geplast.fr.

Our expertise

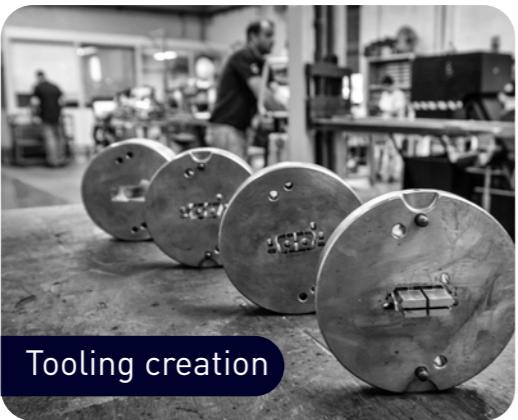

The advantages of PVC

It contains less petroleum than other major thermoplastics and therefore has a much smaller carbon footprint. 100% recyclable, insulating and durable over time, PVC brings performance and resistance to our products.



Thermal insulation

Both flexible and rigid, PVC has excellent insulating thermal and phonic properties.



Good value for money

PVC is one of the most competitive materials on the market. Less expensive than wood and aluminum, the manufacture of PVC remains simple and its use is multiple.




Maintenance

Very resistant, the PVC is not sensitive to pollution and external aggressions. Therefore, its maintenance is minimal, a little water and soap are enough.




PVC has good dimensional stability and limited shrinkage due to its particularly resistant structure.

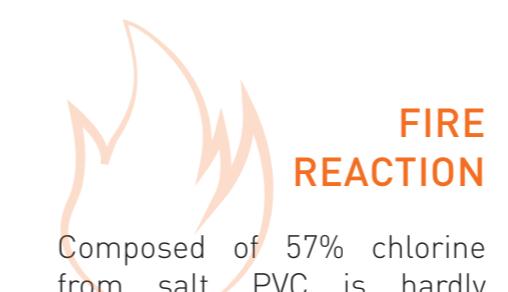

Fire reaction

Composed of 57% chlorine from salt, PVC is hardly flammable and extinguishes itself once the fire is under control.

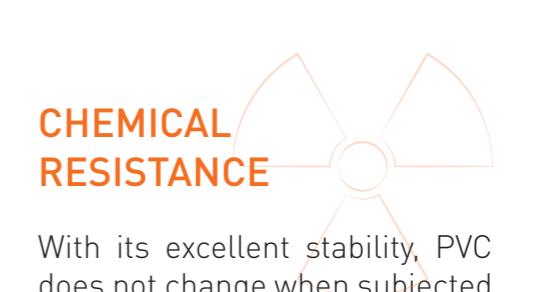

With its excellent stability, PVC does not change when subjected to chemicals (salts, alcohols, grease, mineral oils...).



GEKO
Eco-designed by nature

From the outset, the products in the GEKO range are part of a **decarbonized** and **sustainable life cycle**. As a matter of principle, and as far as possible, recycled materials will be used. **All offcuts are sorted, crushed and re-extruded.**

In addition to recycled material, GEKO uses alternative composites, from almost inexhaustible agricultural resources or bio-sourced materials.

Similar to a "**gecko**", a type of lizard found in many parts of the world, the products in the range meet three basic requirements :

- **eco-responsibility** → nature
- **product quality** → agility
- **customized solutions** → great adaptability

A symbol of Geplast's commitment to environmental protection, GEKO is a new green experience in the history of building, simply because it is "**Eco-designed by nature**".

REFLECTION & DESIGN

Reflection is the starting point for the design of a product. So we think about the composition of the products, the technical performances we want to obtain as well as the materials to use. The goal is to reduce our environmental footprint as much as possible.

RESOURCES CHOICE

- **100% recycled PVC**, obtained through the management of our offcuts transformed into extruded co-products or from our local recycling partners.
- Use of bio-sourced materials such as Loryza®. Composed of **60% natural material** (rice husk), it contains a much lower proportion of petroleum than virgin PVC.

At Geplast, 200 tons of recycled material are used per month to make our products, representing **37%** of our total production.

*For example, the proportion of recycled material in our new IrYs box is **98%**, more than **80%** in our window treatments and **60%** for our products made of Loryza® material for the outdoor range.*

TRANSFORMATION EXTRUSION

We favor co-extrusion* for the development of our GEKO products.

The visible outside is made of 0.5 mm of virgin material to keep the technical aspects on the surface and the inside is made of recycled material. The eco-design of our products also involves thinking about energy savings, for example by changing the cooling system of our machines. They will be more energy efficient.

**This extrusion process makes it possible to obtain a product combining two different formulations to form a single product.*

DELIVERY TO CUSTOMERS


To limit our carbon footprint, our deliveries are optimized to avoid round trips.

USE

Our customers generate co-products which we recover and purchase for reuse.

END OF LIFE RECYCLING

The lifespan of PVC products is 30 years. They are then recovered and recycled by waste treatment companies. Once this step is completed, Geplast takes back the recycled material to create new profiles and products.

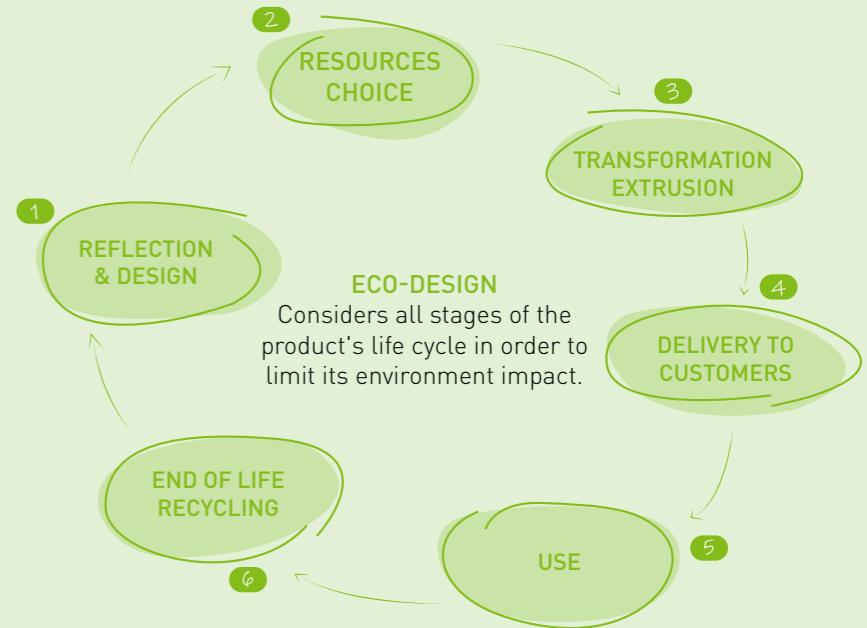

REDUCING OUR CARBON FOOTPRINT

The eco-design of our products also involves reducing our carbon impact. Since 2018, Geplast's R&D department and the firm EVEA have been conducting a study to calculate the carbon costs of our recycled materials and measure the energy consumption of some of our extrusion lines. This questioning is formalised by the EPR, which was introduced in 2023 and which should over the years require manufacturers to carry out Life Cycle Analyses (LCAs) in order to produce Environmental and Health Declaration Sheets (EHSDSs) for each product, which will be published in the Inies database and checked by inspection bodies.



At Geplast, we have obtained EcoVadis certification, an international label that assesses companies' CSR performance in four areas: **environment, social, ethics and responsible procurement**.

This certification marks a key milestone in our eco-responsible approach. It validates the actions already taken within our company and encourages Geplast to continue its efforts to combine innovation, competitiveness and responsibility.


For us, being EcoVadis certified is a way of guaranteeing our customers, partners and employees that our CSR commitments are concrete, monitored and independently assessed

MORE LABEL

For the sixth year running, Geplast has been awarded the first European label recognising our commitment to reducing the environmental footprint associated with the manufacture of our products by promoting the use of recycled raw materials.

Awarded by the French Plastics and Composites Federation (Fédération de la Plasturgie et des Composites), the MORE label (MO bilisés pour RE cycler) is proof of our progress in incorporating recycled materials into the production of our profiles.



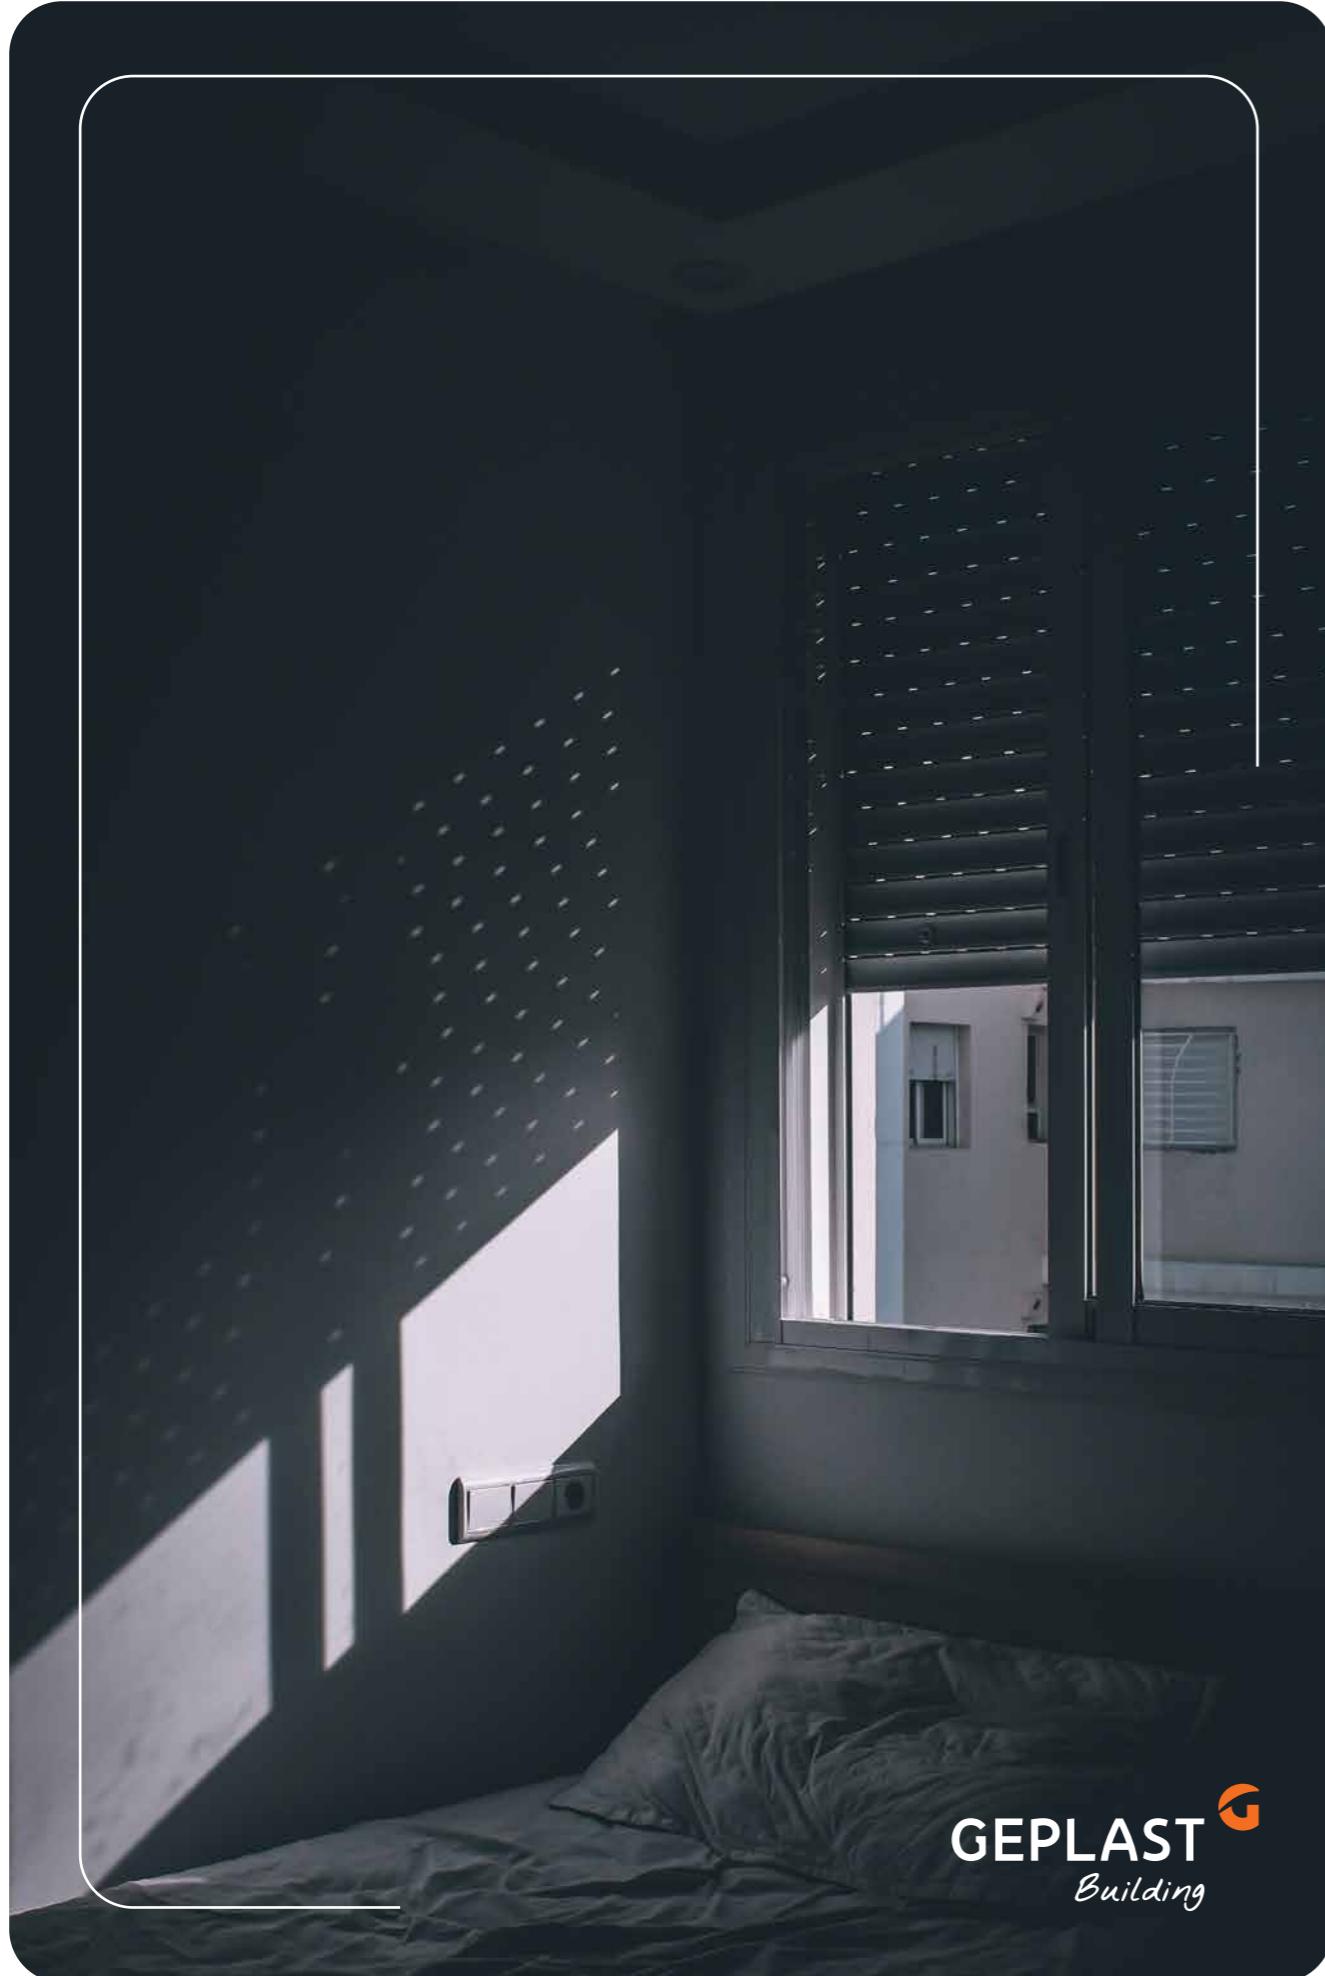


ROLLER SHUTTERS

- 10** Our range of boxes
- 12** IrYs®
- 16** FoKus®
- 20** Reno City®
- 22** GVR.r
- 24** GVR.e
- 26** Lame Bioclimatique®
- 34** Guides
 - › PVC
 - › ALU
- 36** Practical guide
- 38** Oktogo® range

Our range of boxes

Geplast offers the widest range of roller shutter boxes on the market, in order to respond to all installation problems. Whether for new construction or renovation, whatever your joinery, you will find a solution adapted to your situation.




IrYs® HALF-LINTEL BOX

Made from 98% recycled material.

It meets the requirements of sustainable construction and the RE2020.


The first box on the market to obtain a technical opinion for window widths of up to 3.50 m.



FoKus® INTERIOR WINDING BOX

Available in 3 sizes :
168, 205 and 235 mm

FoKus® perfectly meets the new energy standards : thermal, acoustic and aeraulic. These values are certified by PV of the CSTB and the FCBA.



Reno City® EXTERIOR RENOVATION BOX

Perfect for the renovation of your buildings.


Ideal with solar motorization use.



GVR.r PVC EXTERIOR RENOVATION BOX

Access to the mechanism from the inside, ideal for collective housing.

Preserves the intrinsic performance of the joinery.




GVR.e EXTERNAL WINDING BOX

Ideal for new generation buildings with thermal insulation from the outside.

Adaptation on all PVC, ALU and WOOD joineries.



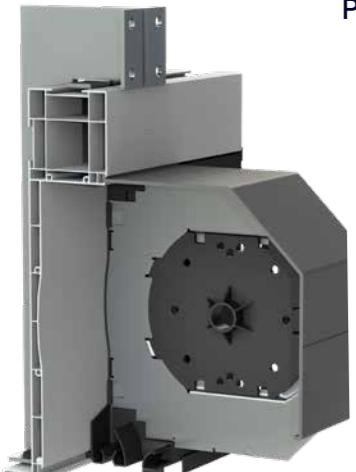

PATENTED SYSTEM



FDES n°32377



IRYS
BOX IN
VIDEO



IrYs®

HALF-LINTEL BOX

Designed to be part of a sustainable construction approach, the new IrYs half lintel box is made from **98% recycled material**.

It therefore meets the challenges of the **RE2020** (lowcarbon construction) and offers genuine **thermal and acoustic insulation and airtightness performance** for the end user.



CERTIFIED PERFORMANCE

THERMAL : Up = 0,64 W/m².K as 120 mm fixed frame

ACOUSTIC :

Dn,e,w + Ctr 56 dB in standard configuration,

Dn,e,w + Ctr 59 dB with options

Dn,e,w + Ctr 55 dB in standard configuration with the ventilation grid (PV CSTB)

AERONAUTIC :

Air flow : C*4 with winch and motor (PV CSTB)

Wind : V*4 opening widths of 3.5 m with support lugs RF038 (PV CSTB)

1st roller shutter box on the market to obtain technical approval for window widths of up to 3.50 m

SOLAR PROTECTION



IrYs® ZIP
Blind screen



IrYs®
Lame Bioclimatique®




IrYs®
BSO SLAT

INSTALLATIONS




Installation on
timber-frame house




Half-lintel
installation

PLANKS IRYS® (200 MM) FOR HALF LINTEL INSTALLATION

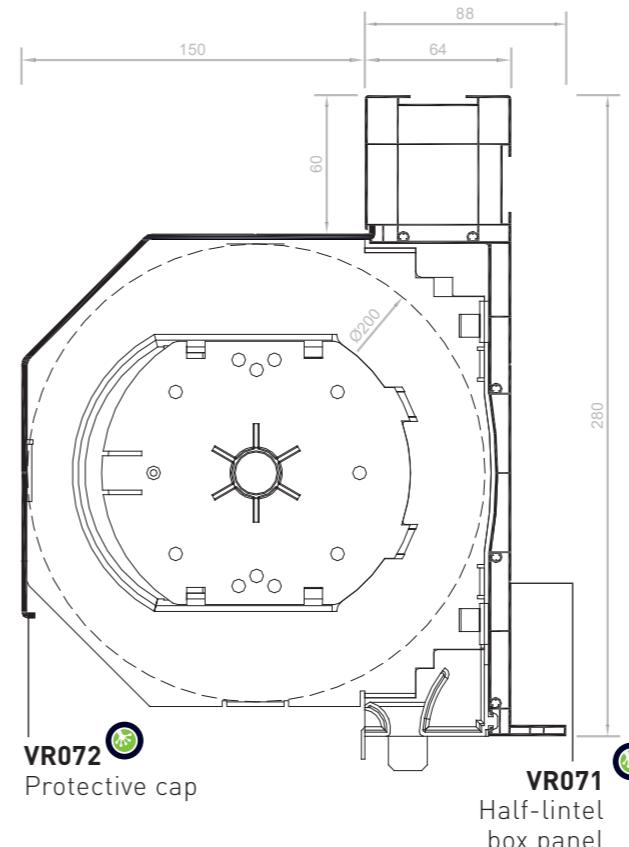

VR072 Protective cap
VR071 Half-lintel box panel

PLANKS IRYS® (160 MM) FOR INSTALLATION ON TIMBERFRAME HOUSE AND EXTERIOR THERMAL INSULATION

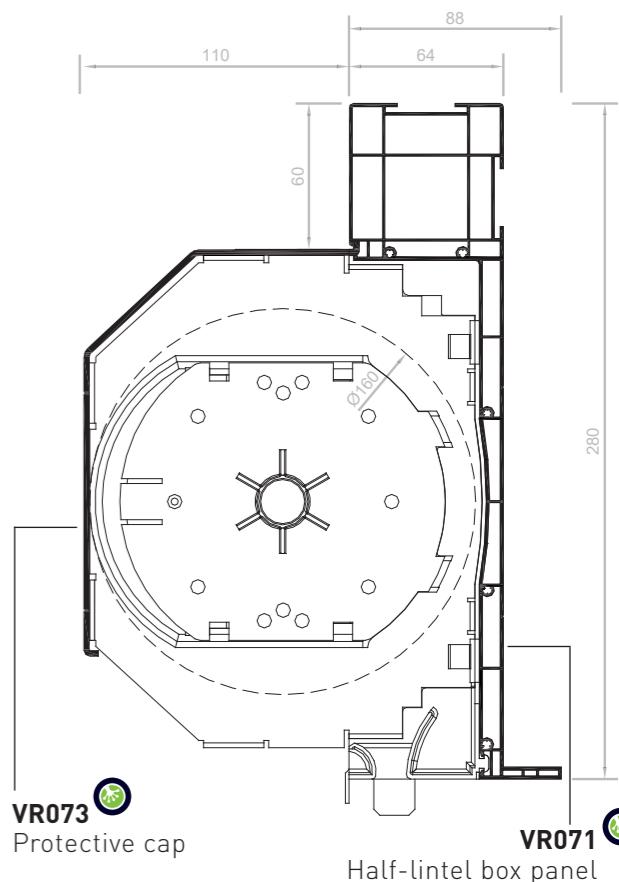

VR073 Protective cap
VR071 Half-lintel box panel

A TECHNICAL RESPONSE

IrYs® is mainly suitable for two types of installation :

- Traditional masonry with maximised winding at Ø200,
- Timber frame with maximised winding at Ø160.

It is compatible with all types of solar protection : **Lame Bioclimatique®**, long-span slats for **XXL bays** up to 3.50 m, standard market slats, **BSO** and **insect screens** (better management of solar gain, avoids overheating in buildings in summer and considerably reduces the use of air conditioning).

The assembly of this patented box is fast and industrial:

- simple clipping of end caps, brackets and integration of tulips and brackets (no screws and no silicone),
- the support lugs system is easy to install, there is no need for steel reinforcement,
- after-sales service is facilitated by the removable drawers

PACK SIZES

	VR071	VR072	VR073
Bars of 6 ml / pack	2	2	2
Bars of 6 ml / container	30	100	150
Bars of 6 ml / half container	-	50	-

COLORS OF UNDERSIDES "FLORAL"

The "Floreal" colour is derived from the recycling of unused resources in production. The boards can therefore take on different shades.

NEW MONOBLOCK UNDERSIDES

VR078

Underside panel 183 mm
5 bars of 6 ml / pack
87 bars of 6 ml / container



VR079

Underside panel 198 mm
5 bars of 6 ml / pack
87 bars of 6 ml / container



UNDERSIDES 8MM

VR057

Underside panel 200 mm
4 bars of 6 ml / pack
108 bars of 6 ml / container



VR058

Underside panel 185 mm
4 bars of 6 ml / pack
108 bars of 6 ml / container



VR060

Underside panel 193 mm
4 bars of 6 ml / pack
108 bars of 6 ml / container



UNDERSIDES & RAIL COVER COLORS

A difference in finish between the underside and the rail cover may exist for dark mass-colored colors.

MASS COLOURED



The new undersides are more robust thanks to their 17mm thickness.


They feature an integrated rail-hiding spoiler to optimize inventory and logistics.

They fit all tunnel and 1/2-tunnel boxes.

To avoid warping, we recommend storing the undersides in a dark place, flat along the entire length of the profile.

NEW ANGLE BRACKET AC099 FOR UNDERSIDES



The new AC099 underside reinforcement bracket for tunnel and half-lintel boxes has been designed to eliminate deformation on long lengths. Compatible with our range of fascias and finishing profiles, it is screwed directly into the box (pre-drill if using non-self-drilling screws). Plus, AC099 is made from 100% recycled material.

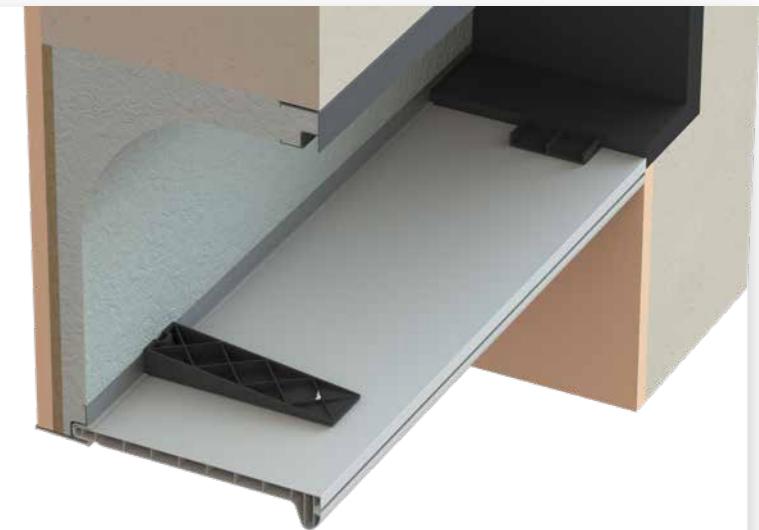

Colors




AC099_N0004
Reinforcement bracket
100 pieces / box

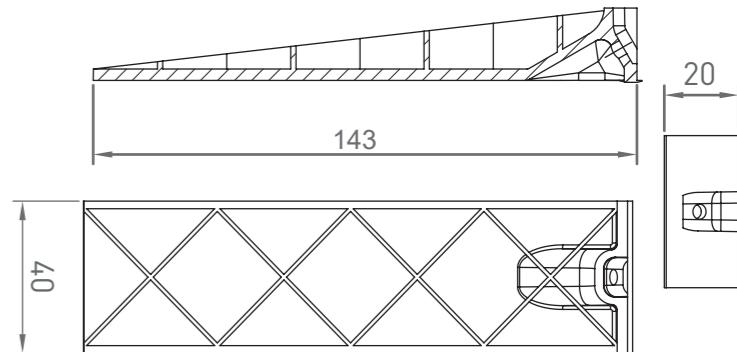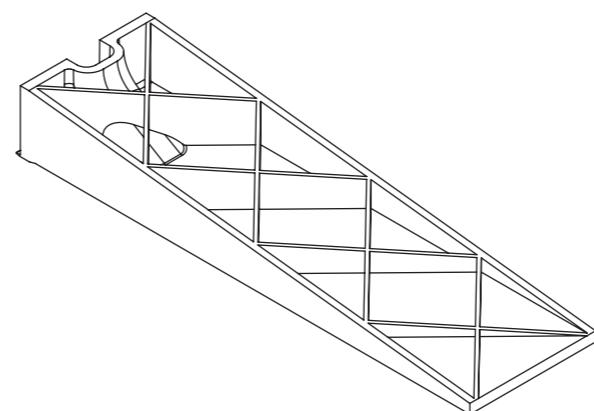

80+ plated film decors
available upon request

PLAXED



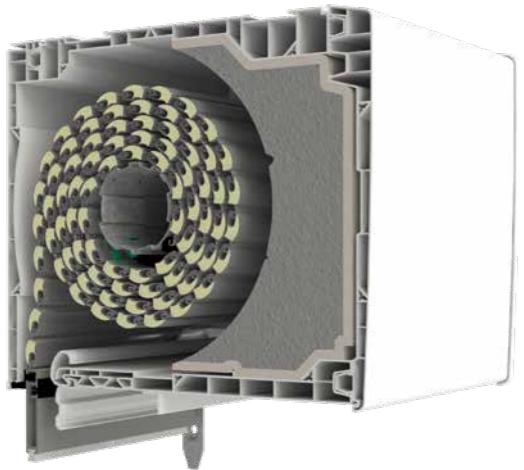

FoKus®

INTERIOR WINDING BOX

FoKus® is available in 3 sizes : 168, 205 and 235 mm.



A TECHNICAL RESPONSE

The FoKus® box has several features. **It can be installed on all types of joinery** thanks to the patented universal adapter concept. Compatible with all maneuvers, it can be used with PVC or ALU aprons and rails

FoKus® is compatible with **the bioclimatic slat** and can also accommodate a **BSO (Solar shading)**. It also has the option of "**Underside access**" to facilitate maintenance work from the inside.

Customizable thanks to its many available finishes (mass-coloured, plaxed or aluminum filmed).




ACERMI n°20/256/1488/1




SOLAR PROTECTION



Fokus® ZIP
Blind screen

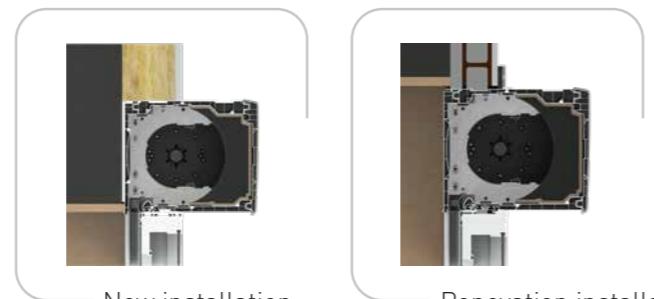

Fokus®
Lame Bioclimatique®

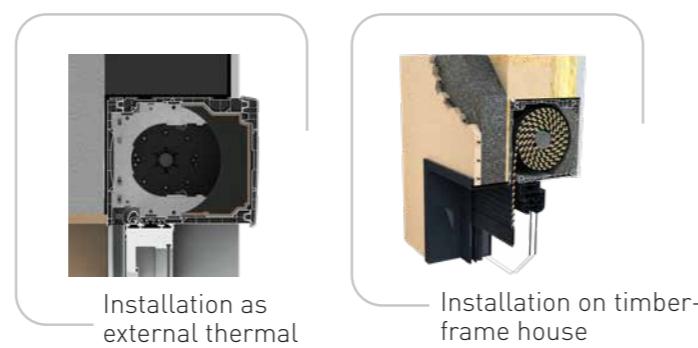

New installation
Renovation installation
Installation as
external thermal
insulation
Installation on timber-
frame house

COLORS OF THE PLANKS

MASS COLOURED



White Beige Mouse grey

PLAXED



Golden Oak Grey
anthracite

ALUMINIUM FILMED (except trunk 235 mm)



White Grey
anthracite

80+ plated film decors
available upon request

**FOKUS®
BOX IN
VIDEO**



CERTIFIED PERFORMANCE

THERMAL :

$U_c = 0,76W/m^2.K.$ with 120 mm frame (FoKus 168 mm)
 $U_c = 0,82W/m^2.K.$ with 120 mm frame (FoKus 205 mm)
 $U_c = 1,32W/m^2.K.$ with 120 mm frame (FoKus 235 mm)

ACOUSTIC :

$Dn,e,w + Ctr$ up to 53 dB without heavy mass bonding (PV FCBA)

AERACULIC :

Air flow : C^*4 with motor, winch and TSL and C^*3 with strap
Wind : V^*4 in 3 ml width

DURABILITY TESTS :

1,000 pressure/vacuum cycles without screwing down the inner reinforcement




The FoKus® interior roller shutter box range combines all the requirements for tomorrow's buildings by reducing its overall impact on human health (solar gain management, perfect air tightness, maximum acoustic comfort) and on the environment (high thermal insulation and product recycling at the end of its life).

FoKus® reached **53 dB** without heavy mass bonding (PV FCBA)

It thus perfectly meets the new energy standards: **thermal, acoustic and aeraulic**. These values are certified by the PV of the FCBA.

FOKUS® 205 MM

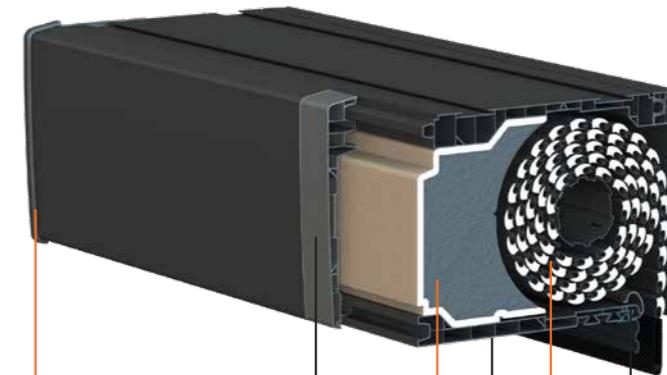

ALUMINIUM FILMED
PVC box panels covered
by aluminium sheet.

UNIVERSAL ADAPTOR
Patented set of 4 interfaces and
an underside to adapt to all joinery
ranges.


THERMO-ACOUSTIC COMPLEX
Patented, it combines acoustic
attenuation while maintaining a high
thermal level.

BRACKET / SLIDE
Facilitates maintenance or
modernisation work.

OPTION : UNDERSIDE ACCESS
Provides easy and rapid access to
all the interior of the box.

BIOCCLIMATIC SLAT - PVC OR ALU
Micro-perforated, it provides more than
4 times the daylight and ventilation
than a standard slat.

PLANKS FOKUS® 168 MM

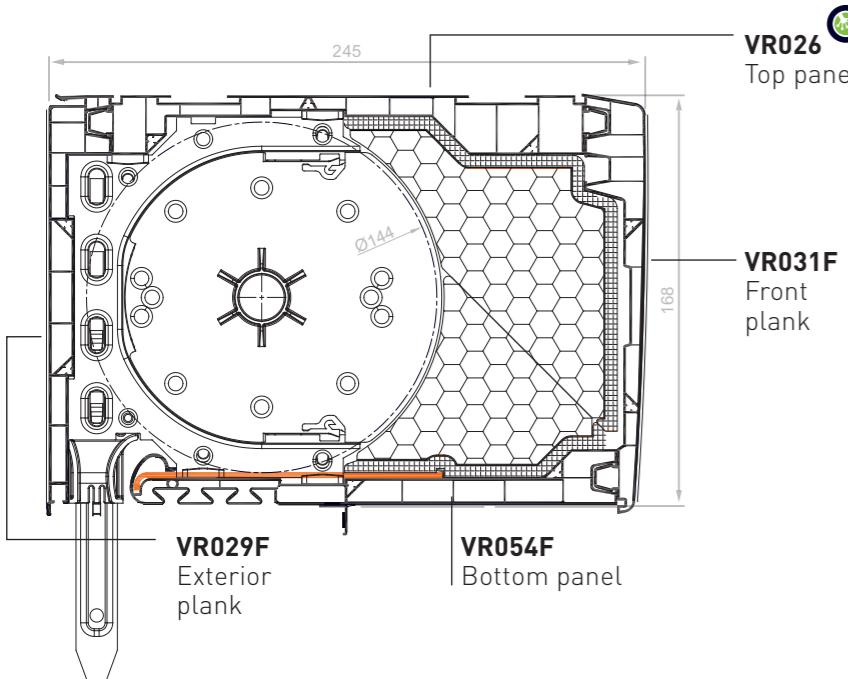


PLANK KITS 168 MM

VRKI1C

4 planks kit : VR026 + VR029F + VR031F + VR054F


1 kit / pack
18 kits / container

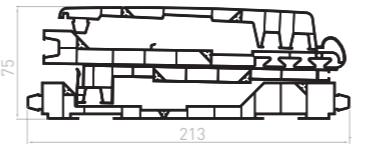


VRKI1CE

Two-colour 4 panels kit:
3 white PVC panels VR026
+ VR031F + VR054F
and coated exterior facade VR029
(standard colors available)

1 kit / pack
18 kits / container

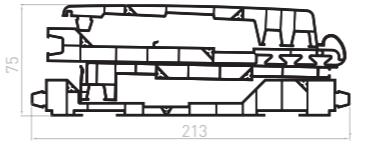


PLANKS FOKUS® 205 MM

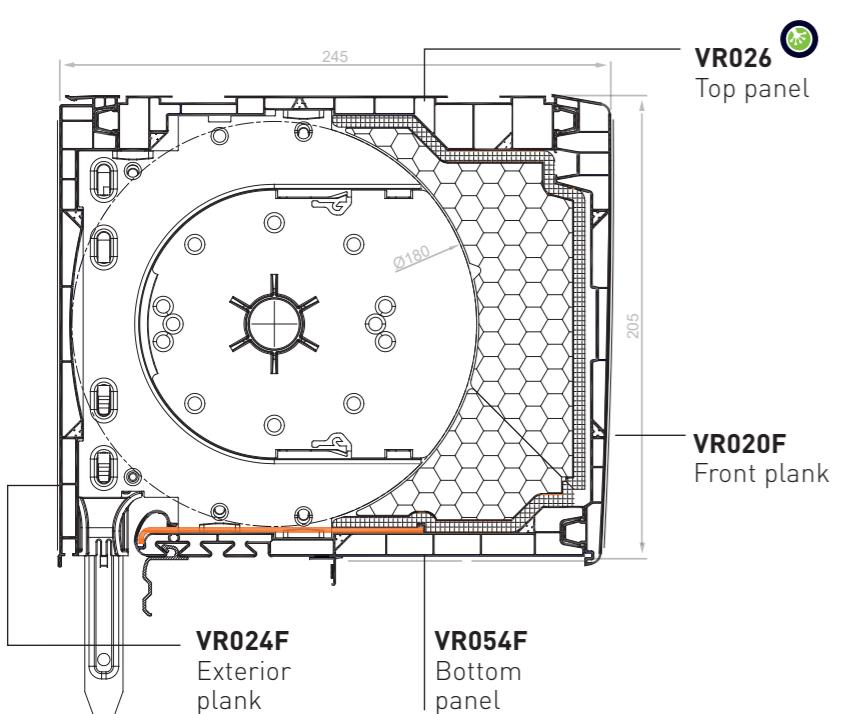

PLANK KITS 205 MM

VRKI2C

4 planks kit : VR020F + VR024F + VR026 + VR054F
1 kit / pack
18 kits / container

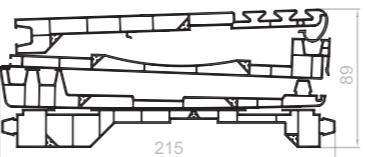


VRKI2CE

Two-colour 4 planks kit :
3 white PVC panels VR020F +
VR026 + VR054F
and coated exterior facade VR024
(standard colors available)

1 kit / pack
18 kits / container



PLANKS FOKUS® 235 MM

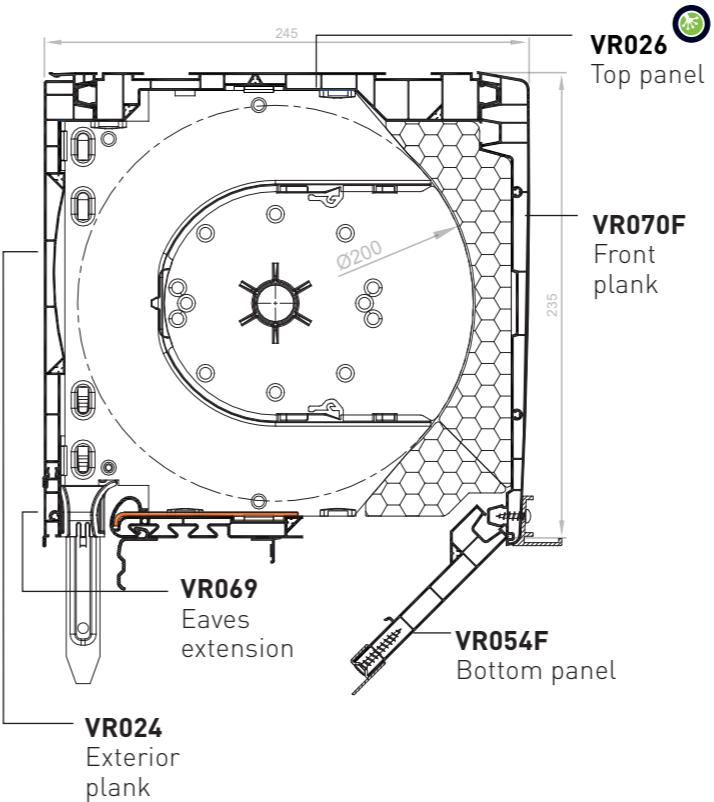


PLANK KITS 235 MM

VRKI3C

5 planks kit : VR024 + VR026 + VR054F + VR069 + VR070


1 kit / pack
16 kits / container

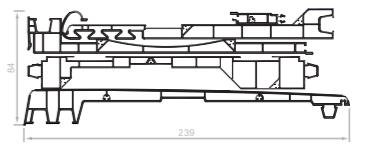


VRKI3CE

Two-colour 5 planks kit : VR070F + VR026 + VR054F and coated exterior facade VR024 and VR069

1 kit / pack
16 kits / container

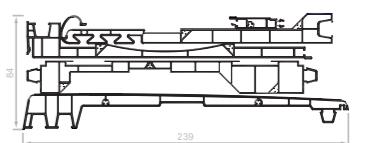


PLANKS FOKUS® 235 MM WITH BSO

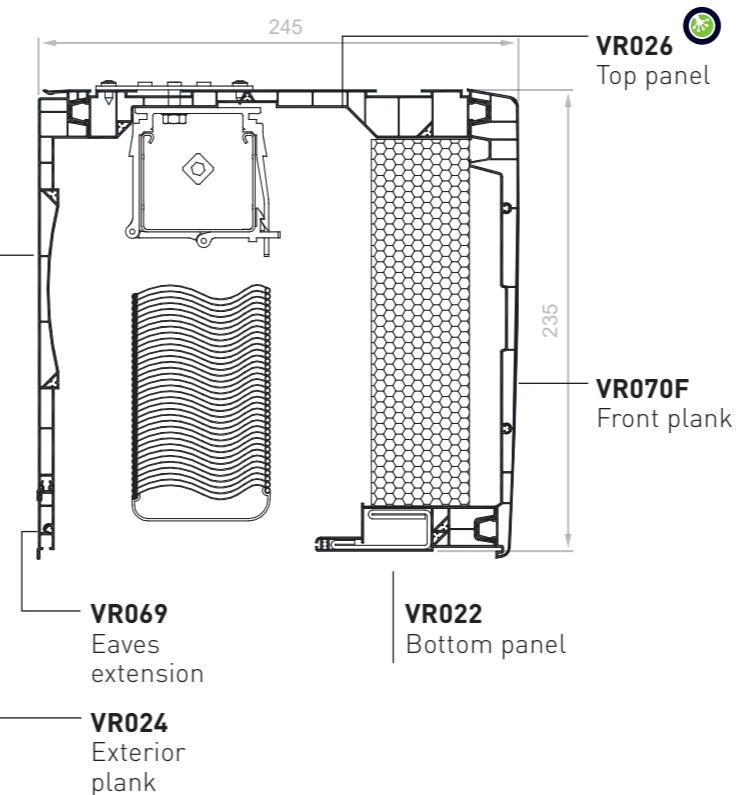

VRKI3D - SWIVELLING SUNSHADE INTEGRATION KIT VERSION

5 planks kit : VR022 + VR024 + VR026 + VR069 + VR070

1 kit / pack
16 kits / container

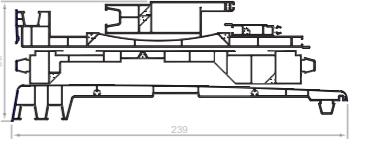


PACK SIZES

VR020F	VR024F	VR026	VR029F	VR031F	VR054F
Bars of 6 ml / pack	4	4	4	4	4
Bars of 6 ml / container	72	90	74	120	108

PACK SIZES

VR022	VR024	VR026	VR054F	VR069	VR070F
Bars of 6 ml / pack	4	4	4	10	4
Bars of 6 ml / container	160	90	74	96	66

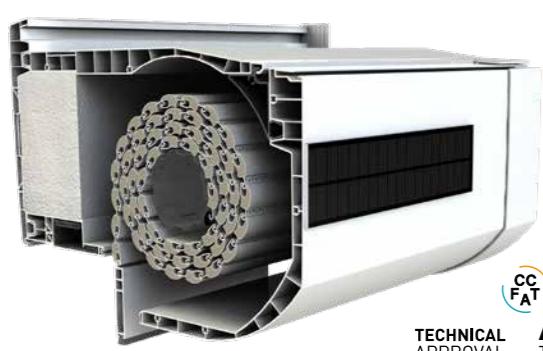

Reno City®



LET'S RENOVATE THE CITY OF TOMORROW

3 active patents on the box.
Ideal for the renovation of your buildings.

A TECHNICAL RESPONSE

Under technical approval, the Reno City® is characterized as a compact box offering a **144 mm clear glazing**, while maintaining a maximum roll-up diameter of **170 mm**. Moreover, it has an **excellent thermal and acoustic insulation**.

Equipped with an integrated ALU stiffener, it allows **the realization of large width boxes (3 ml)** with a plaxed finish.

Another advantage is **the integration of a drawer**, which facilitates maintenance intervention, and the patented clip-on system of the brackets, which allows the use of narrow slides. It also accepts all market maneuvers and is **ideal for solar motorization use..**

THE CHOICE OF THE SOLAR MOTORIZATION

Reliable and easy to install, the solar motorization has many advantages and is perfectly integrated into the Reno City®.

Installed in the box, the solar motorization works with a sensor that charges the battery and powers the motor. With its integrated solar motorization, Reno City is **the only window box on the market to offer a completely independent window-cabinet installation that is disconnected from the home's general electronic system.**




SOLAR PROTECTION



Reno City® ZIP - Blind screen

INSTALLATIONS

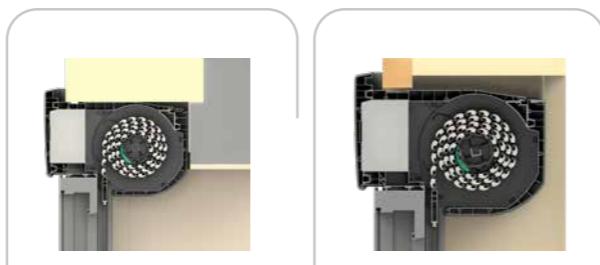

Installation as external thermal insulation




Renovation installation



Reno City®
Lame Bioclimatique®

COLORS OF THE PLANKS MASS COLOURED



White Beige Mouse grey


PLAXED



Golden Oak Grey anthracite

80+ plated film decors available upon request

PLANKS - RENO CITY®

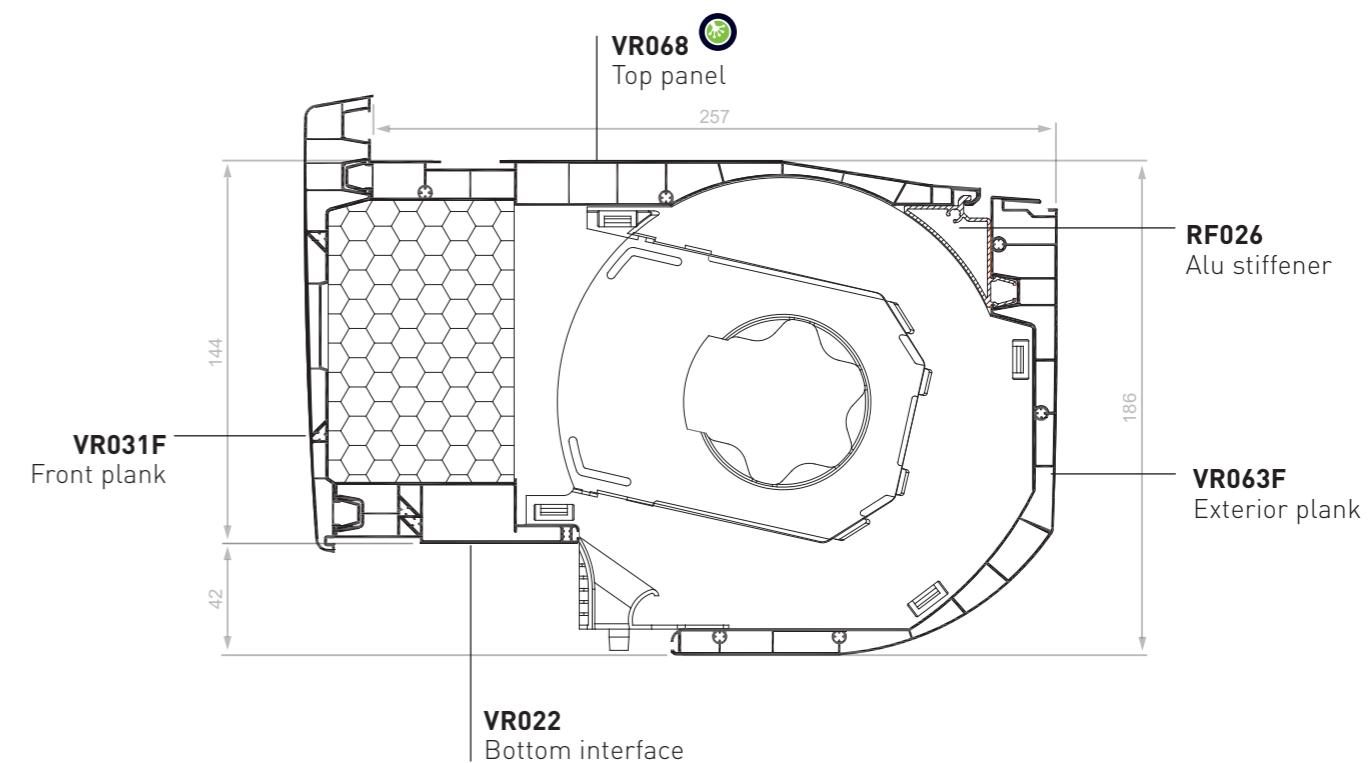

PACK SIZES

	VR022	VR031F	VR063F	VR068	RF026
Bars of 6 ml / pack	4	4	2	4	4
Bars of 6 ml / container	160	108	30	72	-

CERTIFIED PERFORMANCE

THERMAL :

$U_c = 1,03 \text{ W/m}^2\text{K}$. with standard EPS

$U_c = 0,67 \text{ W/m}^2\text{K}$. with reinforced thermal insulation made of graphite EPS

ACOUSTIC : $D_{n,e,w} + Ctr$ 45 dB standard and up to 51 dB

AIR FLOW : C^*4 (AT Value)

WIND : V^*4 with opening width up to 3 m (AT Value)



RENO CITY
BOX IN VIDEO





GVR.r

PVC EXTERIOR RENOVATION BOX

For easier installation and maintenance.

A TECHNICAL RESPONSE

The GVR.r box is assembled independently of the joinery and is fixed directly by screwing (0 silicone, 0 fixing bracket).

The maintenance of the mechanism is facilitated thanks to **the access from the inside**. Its winding diameter is **160 mm** and it can be operated by winch, motor and solar motorization.

SOLAR PROTECTION



GVR.r
Lame Bioclimatique®




CERTIFIED PERFORMANCE


The GVR.r box preserves the intrinsic performance of joinery.

PLANKS - GVR.R

RENOVATION INSTALLATION

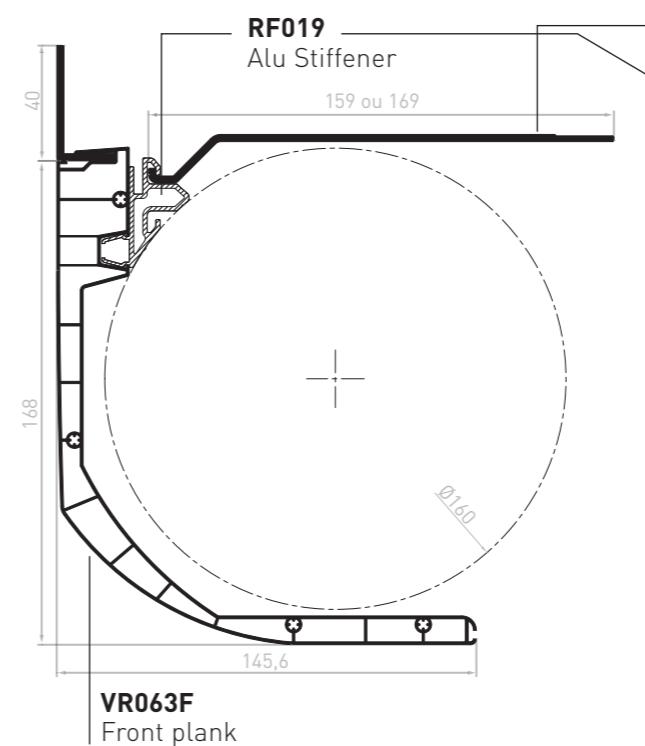

EXTERNAL THERMAL INSULATION RENOVATION INSTALLATION

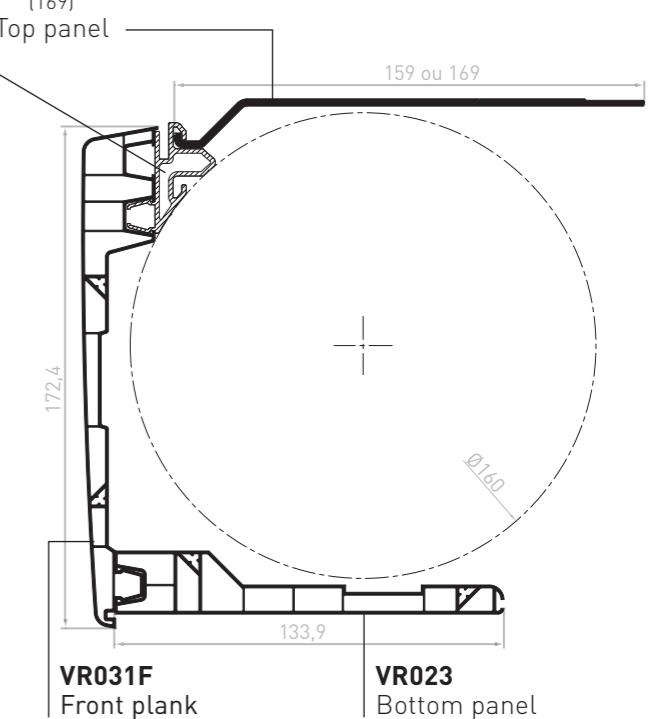

COLORS OF THE PLANKS MASS COLOURED PLAXED



80+ plated film decors
available upon request


PACK SIZES

	VR023	VR031F	VR062	VR063F	RF019
Bars of 6 ml / pack	4	4	6	2	6
Bars of 6 ml / container	150	108	-	30	-

Colors
Black

RENOVATION COVER

AC046
Left and right telescopic end plate
5 pairs / bag

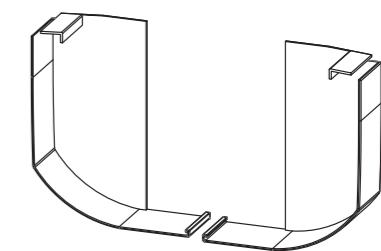

COLORS MASS COLOURED PLAXED




80+ plated film decors
available upon request

END PLATES


AC047
Bearing plate
25 parts / box

AC048
Motor plate
25 parts / box

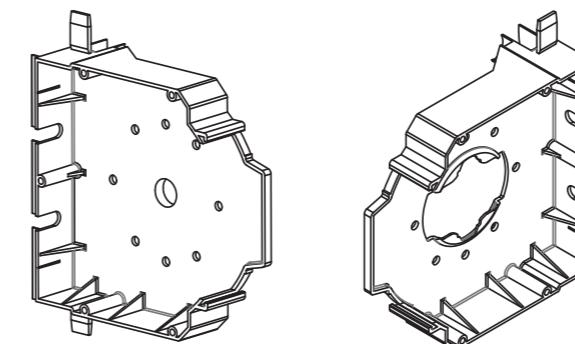

CUSTOMISATION

The exterior panel VR063 is available as mass coloured (white, beige, grey and anthracite grey) and with a PVC or aluminium filming.

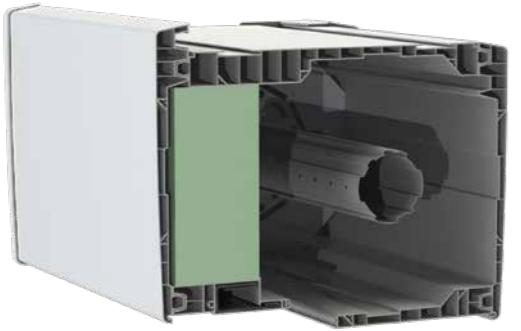

GVR.e

EXTERNAL WINDING BOX

Ideal in new-generation buildings with exterior thermal insulation.


A TECHNICAL RESPONSE

This box adapts to all the joineries of the market: **PVC, ALU and WOOD**. Its roll-up diameter is 186 mm and its access is easy thanks to the interior trapdoor for the first floor.


All types of maneuvers are possible with the exit of the winch on the front or on the underside. The box comes with a screen kit, a set of PVC and ALU guides.




SOLAR PROTECTION




GVR.e
Lame Bioclimatique®



Installation as
external thermal
insulation.



Installation on
timber-frame house



Half-lintel
installation
(1st floor access
through
interior hatch)

The GVR.e is used exclusively for an assembly with a recess between the internal wall of the box and the plane passing through the interior side of the fixed frame or opening casement.

CERTIFIED PERFORMANCE

THERMAL : $U_c = 0.54 \text{ W/m}^2\text{.K}$.


ACOUSTIC : $D_{n,e,w} + C_{tr}$ up to 50 dB (FCBA report)

AIR FLOW : C^*4 for all installations (new/reno) and operations on the market (strap, winch, motor) – [AT value]

WIND : $V4^*$ with opening width up to 3 m [AT value]



PLANKS - GVR.E 205

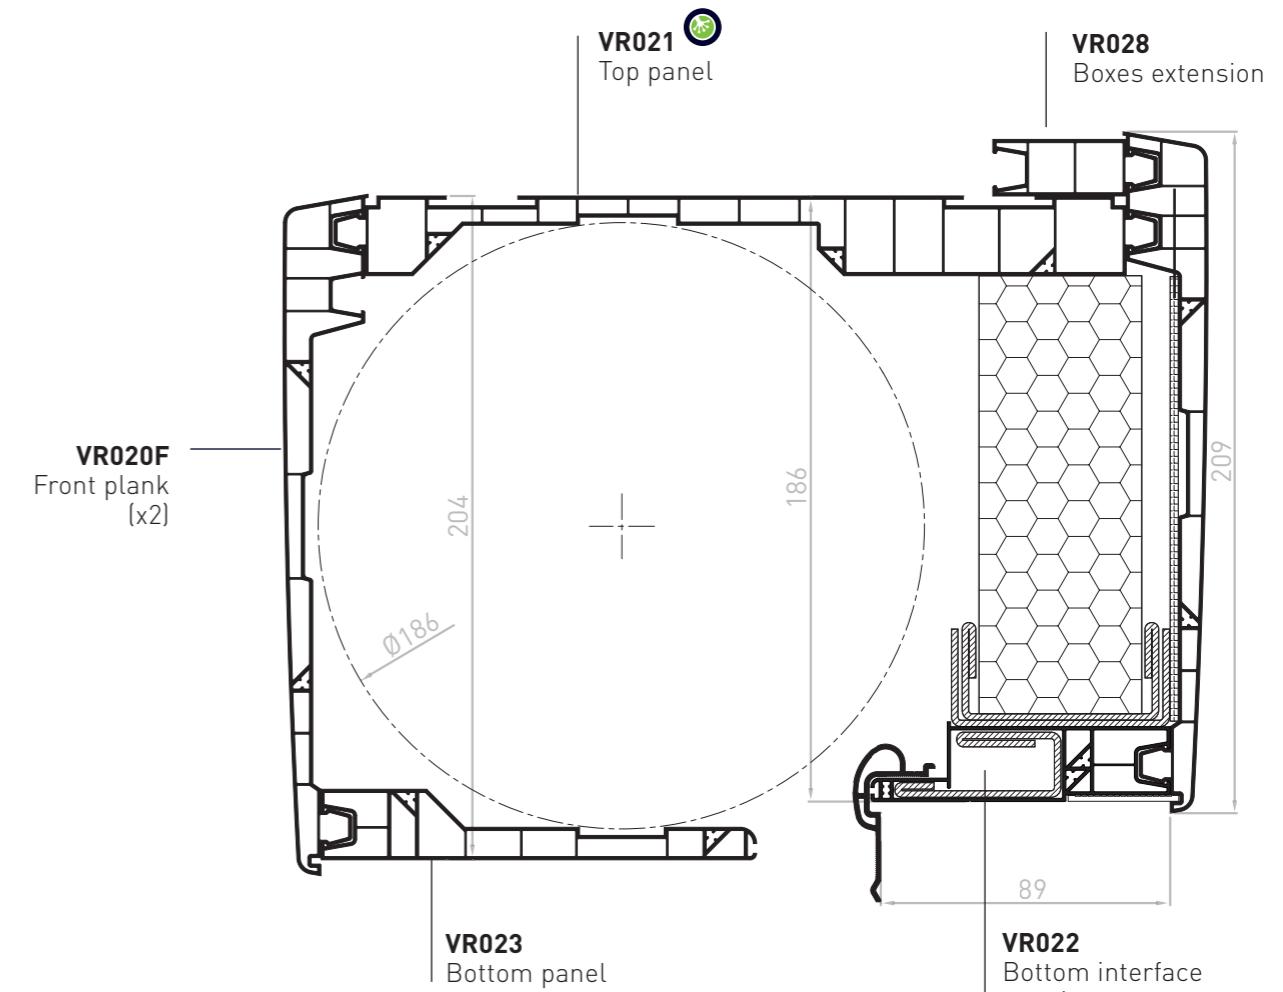

PACK SIZES

	VR020F	VR021	VR022	VR023	VR028
Bars of 6 ml / pack	4	4	4	4	10
Bars of 6 ml / container	72	70	160	150	-

COLORS OF THE PLANKS MASS COLOURED



White Beige Mouse
grey

PLAXED




80+ plated film decors
available upon request

Golden
Oak


Grey
anthracite


PANEL KIT

VRKE2
5 planks kit
[2 x VR020F]+VR021+VR022+VR023
1 kit / pack
18 kits / container

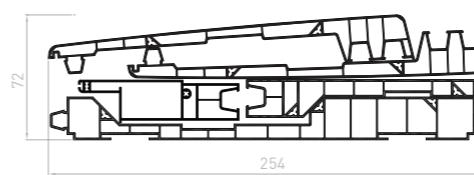


VRKE1
4 planks kit
VR020F+VR021+VR022+VR023F
1 kit / pack
18 kits / container

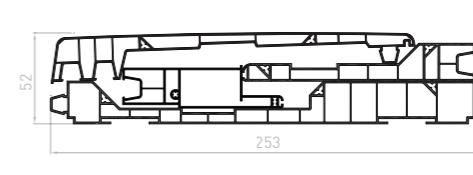

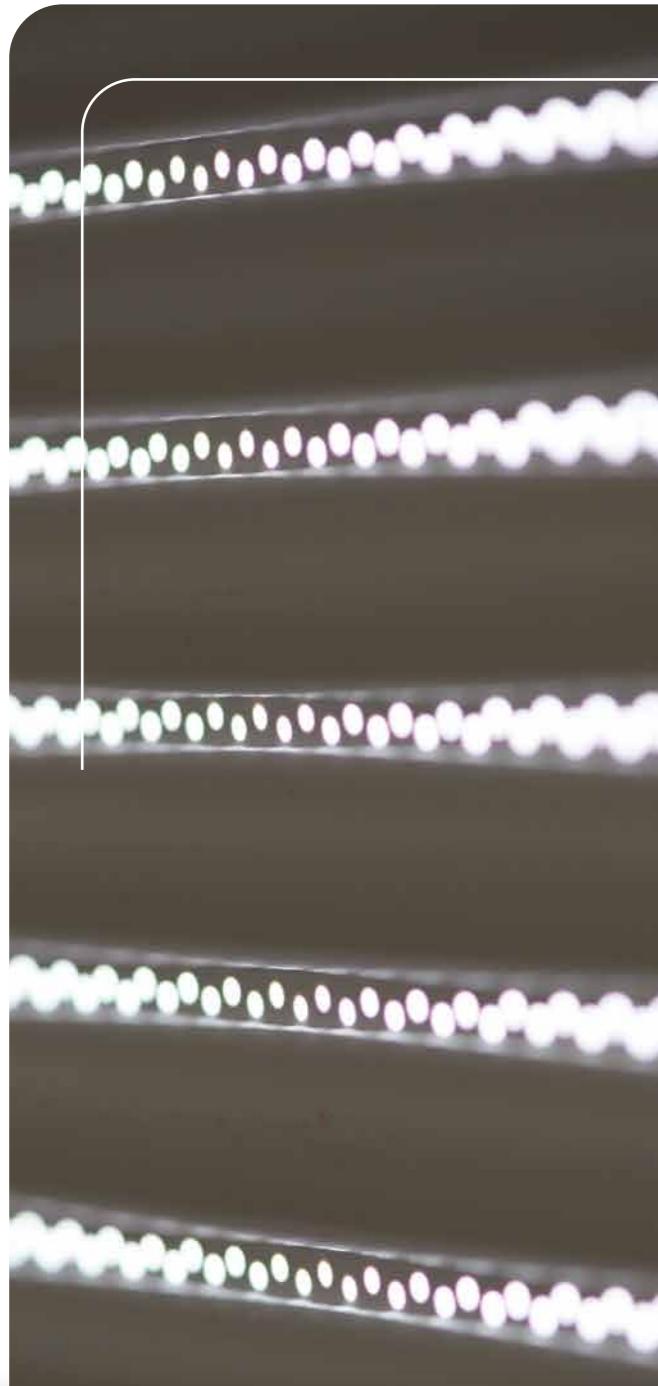


Lame Bioclimatique®
TRADEMARK & DESIGN REGISTERED

A Geplast Building innovation

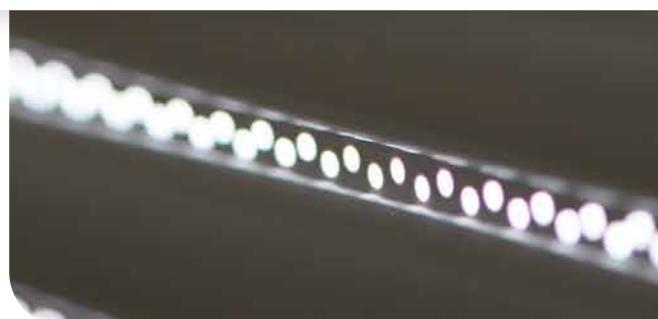

ALUMINIUM

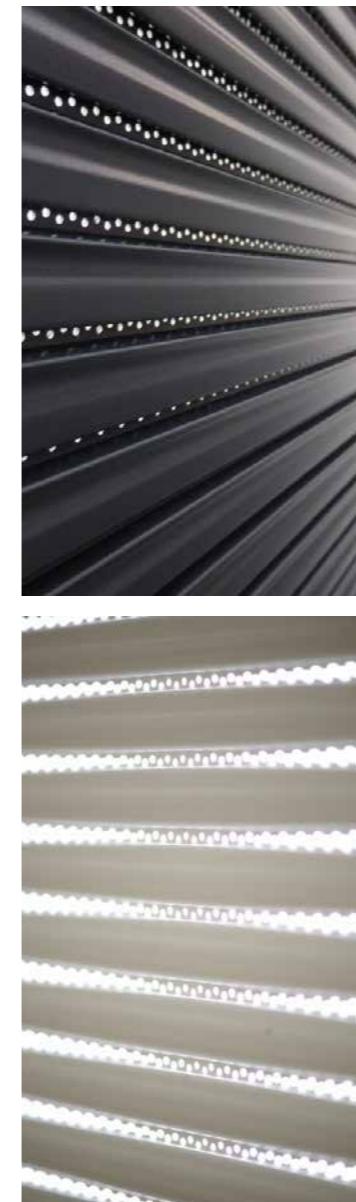

ITS STRENGTHS

◆ *Solar gain management*

Control of solar gain with **4 times more light and ventilation** in the home than a standard slat for optimal comfort in summer.

Exceptional visibility toward outside in the open position.

Regular micro-punching diffusing a soft and soothing light within the living rooms.

◆ *New functionalities*

Safety functions and total opacity in the closed position for optimum sleeping comfort thanks to the development of our rubber seals integrated into our sliders.

Improved acoustic comfort when raising / lowering the apron.

Integrated insect screen and blind functions.

◆ *Easy to implement*

Manufacture and installation identical to a standard slat.

Ideal for large widths bay.

REGISTERED TRADEMARK AND MODEL



The shape and aesthetics of Lame Bioclimatique® are protected at European level by the European Union Intellectual Property Office (EUIPO).



Lame Bioclimatique® is a trademark of Geplast Building and is registered with the Institut National de la Propriété Industrielle (INPI).

AVAILABLE COLOURS

Lame Bioclimatique® & final slat

Please contact us to discover the other colors.

ALUMINIUM

LAQUERED COLOURS



Umber grey | RAL 7022
code : VR040AJ_AL7022



Beige | RAL 1015
code : VR040AJ_AL1015



Black 2100 sanded
code : VR040AJ_AL2100S




Alu natural | RAL 9006
code : VR040AJ_AL9006



White | RAL 9016
code : VR040AJ_AL9016




Anthracite grey | RAL 7016
code : VR040AJ_AL7016



Grey 2900 sanded
code : VR040AJ_AL2900S



Dark brown | RAL 8019
code : VR040AJ_AL8019



Light grey | RAL 7035
code : VR040AJ_AL7035



Black 9005
code : VR040AJ_AL9005

PERFORMANCES

ALUMINIUM

THERMAL

R_{sh} = 0,01 m².K/W
Classe 4 : ΔR = 0,15 m².K/W
Classe 5 : ΔR = 0,18 m².K/W



AERUALICS

Safety pressure classes 1.5p (N/m²)
Tests as an indication

Width Height	0 to 2000	2100	2200	2300 to 2400	2500	2600 to 2800	2900	3000
2250 mm	V*6	V*5	V*5	V*5	V*4	V*4	V*3	V*3
1400 mm	V*6	V*6	V*6	V*5	V*5	V*4	V*4	V*4

LIGHT TRANSMISSION



Normal / hemispheric light transmission factor :
T_v^{nh} = 3% (PV CSTB)

The bioclimatic slat, in the openwork position, is comparable to a awning fabric or ZIP blind in terms of light comfort and provides excellent glare control.

Solar radiation transmittance inside the building, roller shutter closed
Light colours (white, light grey...) (L* >82) Sws = 0,05
Dark colours (brown, black, ...) (L* <82) Sws = 0,10

AIR PERMEABILITY



The bioclimatic slat allows an airflow (over-ventilation that allows the air in the house to be cooled):

Q_a = 939m³/h per m² of deck (PV CSTB)


CORROSION RESISTANT

New, more corrosion-resistant aluminium strip.
Salt spray test (PV CSTB).

REFERENCES AND PACK SIZE

■ The apron must be tested vertically upwards and downwards before being installed on the customer's premises.

Lame Bioclimatique®



NEW

New 0,30mm strip,
achieved with 99,5% recycled aluminium
& more resistant to corrosion.
New high density foam 115Kg/m³ for
exceptional rigidity

Nominal thickness	8,7 mm
Working height	15 mm
Number of slats / m	67
Weight	5 Kg/m ²
Max width	3 m
Max surface area	7 m ²
Standard length	6 m

VR040AJ_AL

Bioclimatic slat ALU openwork roller shutter 15 x 8,7mm
65 bars of 6 ml / pack or 5 trays of 13 slides

Final slat

VR081F_AL

Final slat 49 x 8,5 mm
10 bars of 6 ml / pack



LACQUERED COLORS IN STOCK



Gloss white 9016



Satin anthracite 7016



+ other colours available, similar to those of
Bioclimatic slat from 60ml upwards

AC120_N0004
Final slat seal
200mm roll

COLOR



Black

Installation



FoKus 235 box
Timber frame assembly
ALU bioclimatic slat
anthracite grey 7016

WINDING DIAMETERS IN BOXES

	Maximum number of slats	Maximum height under box	Maximum winding Ø
IrYs	164	2450	Ø 200
FoKus 235	180	2700	Ø 200
FoKus 205	130	1950	Ø 180
FoKus 168	90	1350	Ø 145
GVR.e	150	2250	Ø 185
GVR.dL	150	2250	Ø 185
Reno City	100	1500	Ø 170
GVR.r	103	1550	Ø 160


The heights under the box are given as an indication and must be verified by tests in situ at the assembler's.

Rails and rubber seals


It is imperative to use the PVC/ALU guides, rubber seals and end slats, without which GEPLAST declines all responsibility.

Designed and extruded in ABS and soft PVC for better resistance to heat and shrinkage, our rubber seals can be integrated with Geoplast's PVC or ALU guiderails as well as with traditional and renovation guiderails on the market.

With Geoplast aluminium guide :




AC101_N0004
Black rubber seals
5,3 x 5,4 mm
50 bars of 6 ml / pack




Mounting plan on ALU guide

With Geoplast PVC guide :




AC102_N0004
Black rubber seals
6,7 x 5,4 mm
50 bars of 6 ml / pack




Mounting plan on PVC guide

ALUMINIUM


With traditional aluminium guiderails and market renovations :




AC191_N0004
Black rubber seals
5 x 4,7 mm
50 bars of 6 ml / pack




AC100_N0004
Black rubber seals
5 x 4,9 mm
50 bars of 6 ml / pack




AC103_N0004
Black rubber seals
5 x 5,1 mm
50 bars of 6 ml / pack



AC117_N0004
Black rubber seals
6,7 x 5,1 mm
50 bars of 6 ml / pack




AC118_N0004
Black rubber seals
6,7 x 4,7 mm
50 bars of 6 ml / pack



AC119_N0004
Black rubber seals
6,7 x 6 mm
50 bars of 6 ml / pack



Assembly of the
rubber seal on PVC
guiderail



NB : the bioclimatic slat is used with the PVC guide and the coextruded joint : **JC10**

ALUMINIUM

SPECIFIC MACHINES

Geoplast has set up a partnership with manufacturers of machines and roller shutter end caps. These end caps, to be placed at the edges of the slats, offer many advantages :

- ◆ Reduced manufacturing time
- ◆ Easier to roll up the apron
- ◆ Keeping the slats in place against translation
- ◆ Anti-noise and anti-friction clamping system



Automatic stapler

Machine for cutting and assembling
aluminium roller shutter apron

Manual stapler



END CAP FOR 15 MM BIOCLIMATIC SLAT



AC079
10 000 pieces/box

The end cap is attached to the left and right ends of the aluminium slats. Its role is to stop the horizontal translation of the slats in order to guarantee an optimal operation of the bioclimatic roller shutter.



ALUMINIUM SLAT FORMING MACHINE

"This integration has enabled us to acquire new technical skills in-house and to fully control the production of our bioclimatic slat.

Made from 99.5% recycled aluminium strip, the Lame Bioclimatique® is part of a "responsible" approach. It enables us to meet the challenges of the RE2020, which now requires the control of ventilation and solar gain within homes".


*Maxime Grimault
Sales & Marketing Director*



In accordance with FFB guidelines, roller shutters, when deployed, can sometimes present a wavy appearance. This phenomenon is accentuated for large products. Find out more about the Quality Assessment Guide for roller shutters, available and downloadable from the websites : www.geoplast.fr and www.groupeement-actibaie.org.

COMPARISON ROLLER SHUTTER SLATS

VIDEO
Lame bioclimatique®

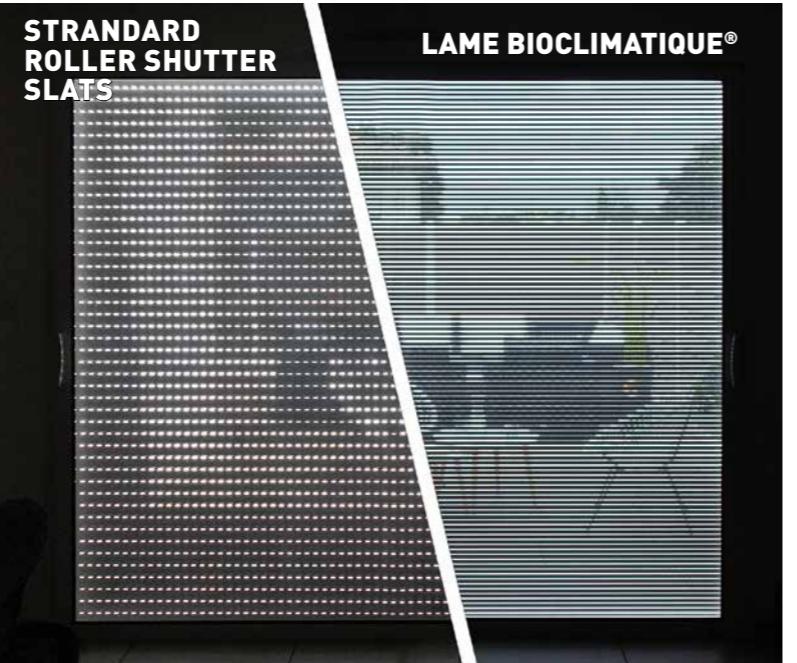

"Classic" blade
43 mm

0.8 x 12mm openings
312mm² for 1m of slats
22 openwork slats for 1m height
=
6,900mm² for 1m²,
0.7 % of openings



Lame Bioclimatique®
15 mm

Holes 1.5mm diameter
588mm² for 1m of slats
52 openwork slats for 1m height
=
30 600mm² for 1m²,
3% openings

3/0,7 = 4,3
*Bioclimatique slat therefore has 4x more light
and air than a "conventional" blade.*
Normal/hemispherical light transmission
factor hemispherical: $T_{vh} = 3\%$ (PV CSTB)

Lame Bioclimatique®

TRADEMARK & DESIGN REGISTERED




Guides

› PVC GUIDES - THICKNESS 2,5 MM

By default, all our veneered PVC guides are delivered with a 12 mm passage (11 mm slat).


VR003F
Single guide
30 mm at 90°

6 bars of 6 ml / pack
320 bars of 6 ml / container




VR004F QB PROFILES DE FENETRES EN PVC
Tapped renovation guide
30 mm with spoiler

4 bars of 6 ml / pack
144 bars of 6 ml / container



VR007F
Renovation guide
30 mm with spoiler

4 bars of 6 ml / pack
221 bars of 6 ml / container




VR008F QB PROFILES DE FENETRES EN PVC
Tapped renovation guide
40 mm with spoiler

4 bars of 6 ml / pack
120 bars of 6 ml / container




VR005F
Single guide
30 mm at 93°


6 bars of 6 ml / pack
300 bars of 6 ml / container



COLORS MASS COLOURED




PLAXED



80+ plated film decors available upon request


VR014F QB PROFILES DE FENETRES EN PVC
Tapped renovation guide
30 mm

4 bars of 6 ml / pack
144 bars of 6 ml / container



VR018F QB PROFILES DE FENETRES EN PVC
Tapped renovation guide
40 mm

4 bars of 6 ml / pack
120 bars of 6 ml / container




› ALU GUIDES



LACQUERED / RAW - DELIVERED WITHOUT BRUSH SEALS


VR003_AL
Single guide
30 mm at 90°

6 bars of 6 ml / pack




VR004_AL
Tapped renovation guide
30 mm with spoiler

4 bars of 6 ml / pack




VR005_AL
Single guide
30 mm à 93°

6 bars of 6 ml / pack



VR008_AL
Tapped renovation guide
40 mm with spoiler


4 bars of 6 ml / pack



› PVC GUIDES - THICKNESS 1.2 MM


VR013JC
Single guide
30 mm at 90° with spoiler

6 bars of 6 ml / pack
300 bars of 6 ml / container



VR015JC
Single guide
30 mm at 93° with spoiler

6 bars of 6 ml / pack
300 bars of 6 ml / container




COLORS MASS COLOURED




VR033JC
Single guide
30 mm at 90°

6 bars of 6 ml / pack
320 bars of 6 ml / container




VR035JC
Single guide
30 mm at 93°

6 bars of 6 ml / pack
300 bars of 6 ml / container




VR036JC
Tapped renovation guide
30 mm with spoiler

4 bars of 6 ml / pack
144 bars of 6 ml / container




VR038JC
Tapped renovation guide
40 mm with spoiler

4 bars of 6 ml / pack
120 bars of 6 ml / container




VR046JC
Tapped renovation guide
30 mm

4 bars of 6 ml / pack
144 bars of 6 ml / container




VR048JC
Tapped renovation guide
40 mm

4 bars of 6 ml / pack
120 bars of 6 ml / container



SEALING PLATES

AC002
For VR004, VR014 and VR007
Rolls 200 pairs / pack




COLORS



AC008
For VR008 and VR018
Rolls 200 pairs / pack




AC007
For VR008 and VR018,
VR009 and VR019
Rolls 200 pairs / pack

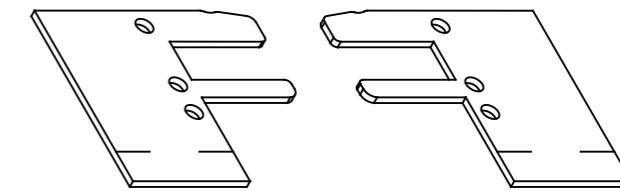

BLOCKS FOR GUIDES


VR009  PROFILES DE FENÊTRES EN PVC
10 mm spacer

10 bars of 6 ml / pack




VR019  PROFILES DE FENÊTRES EN PVC
Edged 10 mm spacer for VR004 / VR006

10 bars of 6 ml / pack

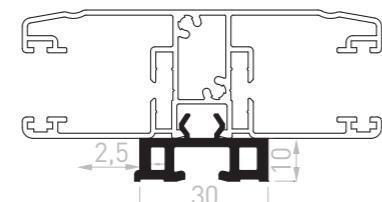


VR012
40 mm connecting profile for double guide

10 bars of 6 ml / pack

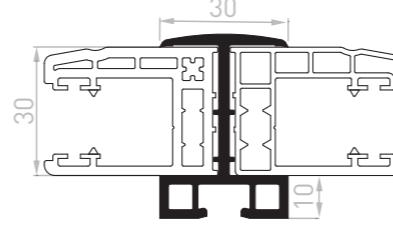


VR065  PROFILES DE FENÊTRES EN PVC
17 mm spacer for tapped renovation guide

6 bars of 6 ml / pack

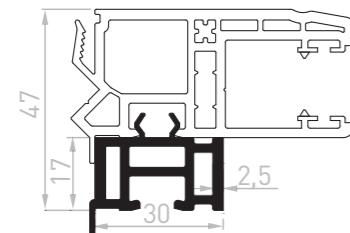

VR065D  PROFILES DE FENÊTRES EN PVC
Edged 17 mm spacer for tapped renovation guide

6 bars of 6 ml / pack

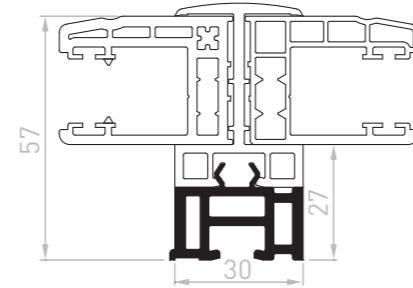


CONFIGURATIONS

Our range of blocks makes it easier to use the key for renovation doors with lock. It prevents the plank from rubbing on the sliding PVC casements.


The VR065 filler plate includes the 120 mm guide when combined with a 40 mm tapped guide (ideal for coated joinery).

The blocks offset the panel of the joinery in the following cases :


ASSEMBLY ON TAPPED GUIDE

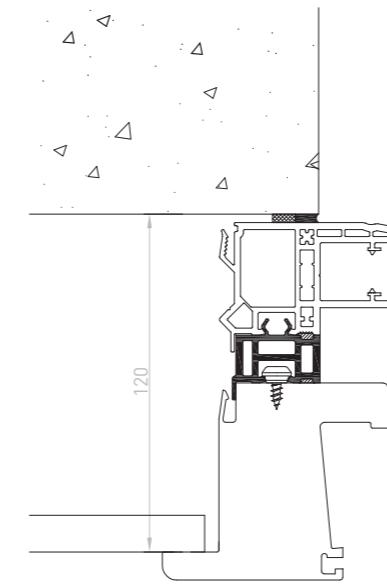


ASSEMBLY ON SLIDING GUIDE

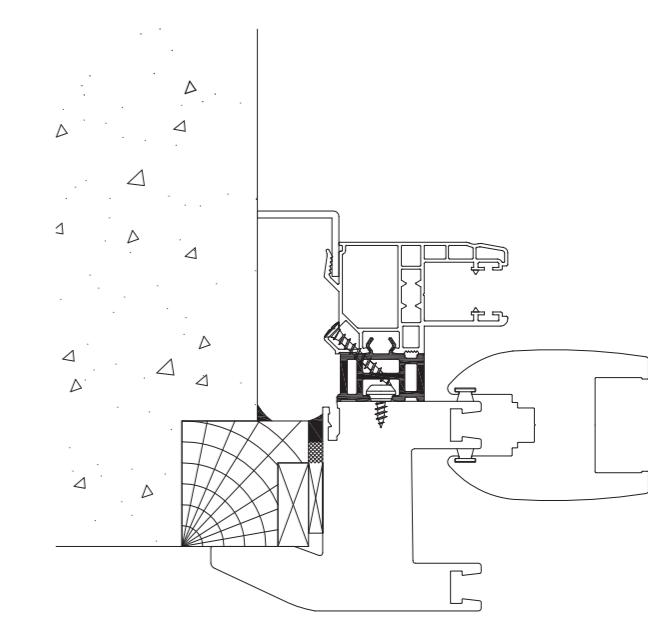

ASSEMBLY ON DOUBLE GUIDE

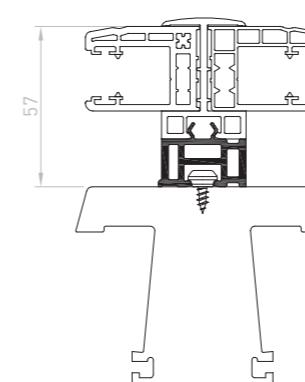

ASSEMBLY ON LOCK HOLDER

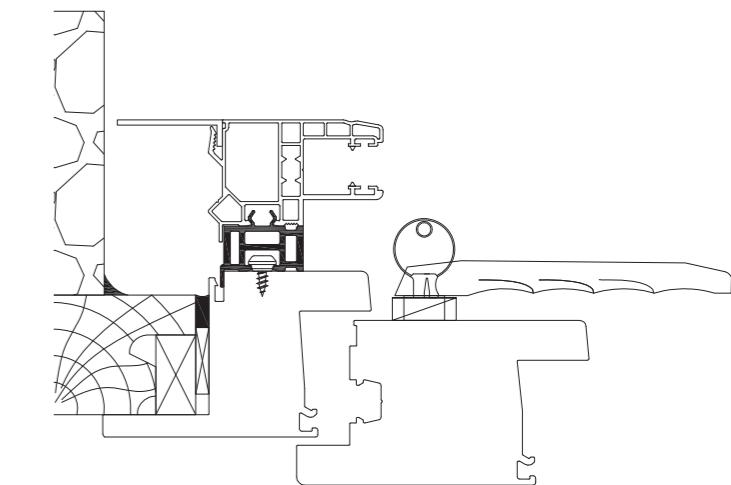


Practical guide


SCREWING

To screw **the guides** to your frame, we recommend two SFS screws :

SFS Screw :
SPK/5-74/GS - 4x10




SFS screw :
SPT/24 - 4,3x30 GS



The **blocks** are all to be fixed with an SFS reference stud screw : SPK/5-74/GS - 4x10

To obtain all the technical documents, including all the installation configurations, please contact our customer service department : commercial@geplast.fr

NEW
Oktogo® range 
Innovation for octagonal tubes

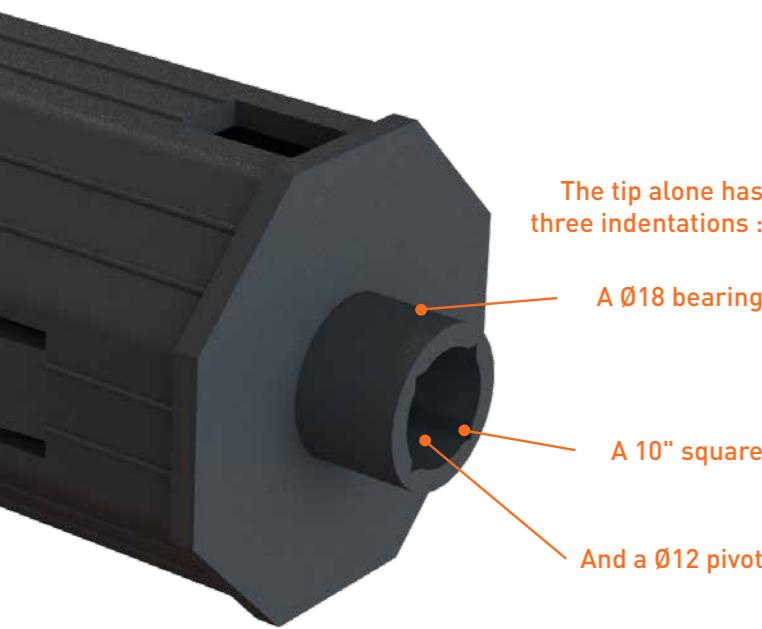

A TECHNICAL SOLUTION

Discover our range of accessories specially designed for octagonal tubes, combining innovation, practicality and environmental commitment.

Versatility and simplicity: A small number of parts for a wide range of uses, optimising assembly and modularity.

Suitable for the French and European markets: Designed to meet quality and safety requirements.

Easy maintenance and after-sales service: Thanks to the telescopic end cap, our accessories ensure quick and efficient maintenance.

Intuitive installation: Automatic clipping of square accessories for simplified and effortless attachment.

Optimised compatibility: Our accessories are perfectly suited to 60 octagonal tubes. Each part is made from 70% to 98% recycled materials sourced from post-industrial waste.

SUITABLE FOR ALL TYPES OF ROLLER SHUTTER BOX

RENOVATION BOX



INTERIOR WINDOW BOX AND HALF LINTEL



TRADITIONAL BOX



> END CAPS



AC180 
Octagonal tube end cap 60
100 pieces / Pkg



AC181 
Octagonal tube end cap 52
100 pieces / Pkg



AC182 
Octagonal tube end cap 40
100 pieces / Pkg

> SQUARES & FORK



AC186 
Fluted mouthpiece
50 pieces / bag



AC187 
Square pin Ø10
100 pieces / Pkg



AC188 
Square pin Ø12
100 pieces / Pkg



AC189 
Clip-on Square
100 pieces / Pkg



AC190 
Fork
100 pieces / Pkg

The claw square allows the Oktogo end cap to be mounted in a renovation box thanks to the Ø12 hole, with claw-type winch operation.

The pin squares are available in Ø10 and Ø12 and can be adapted to boxes with ball bearing mountings.

The clip-on square allows the end cap to be fixed onto metal drawers or consoles, thanks to the fork that is easy to install and remove, making after-sales service easier.



JOINERY

- 42 Renovation joinery installations
- 42 Complete removal solution
- 45 Profiles for classic renovation :
 - 45 > Flaps
 - 48 > Corner angles
 - 50 > Flat sections
 - 51 > Panels
 - 52 > Tapped inserts
 - 56 > Tapped
 - 56 > Glazing bars
 - 57 > Drainage channels
 - 57 > Connecting profiles and joint cover
 - 58 > Trim mouldings
 - 59 > Miscellaneous blocks and profiles
 - 61 > Storage posts

Renovation joinery installations



REMOVING EXISTING FRAMES

The old joinery is removed with its frame. A new window or door is fitted with a frame to ensure a thermal seal between the joinery and the brickwork.





KEEPING EXISTING FRAMES

This type of installation implies the absolute need to maintain suitable ventilation between the old frame and the exterior trim so as not to jeopardise its durability.

NEW TRIM MOULDINGS

Assembly drawing

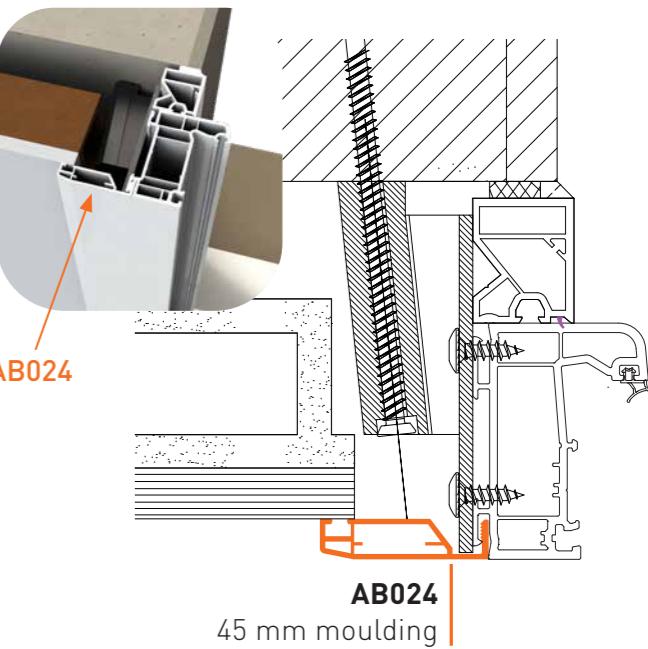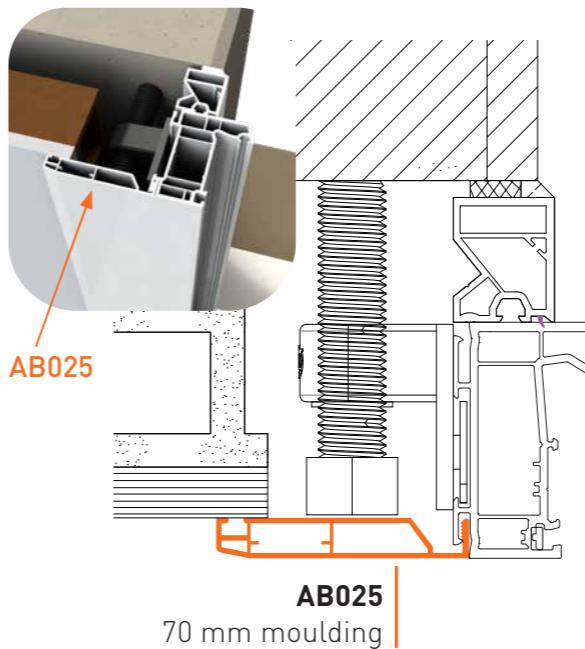

Complete removal solution

ADVANTAGES OF COMPLETE REMOVAL


- Maximum daylight,
- Perfect seal,
- Practically identical appearance to installation in a new construction.

ADVANTAGES OF THE GEPLAST SOLUTION

- Can be adapted to all types of installation on the market thanks to their different widths
- Clip directly into the groove of the double-groove frame and align perfectly with the face of the frame
- The groove on the underside can accommodate compensating shims.
- Thermal improvement during installation by integrating insulation right up to the joinery,
- Installation complies with DTU 36-5.



view from above

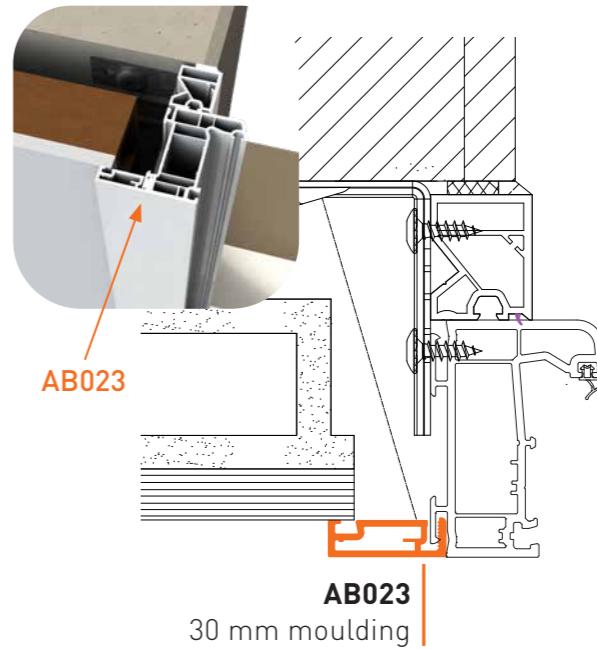

Examples of assemblies with different types of fixings




NEW

MOULDING

COLORS MASS COLOURED




PLAXED



80+ plated film decors available upon request


AB023

30 mm moulding
10 bars of 6 ml / pack
570 bars of 6 ml / container

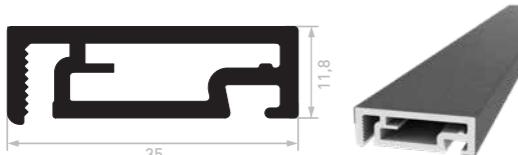


AB024

45 mm moulding
10 bars of 6 ml / pack
546 bars of 6 ml / container

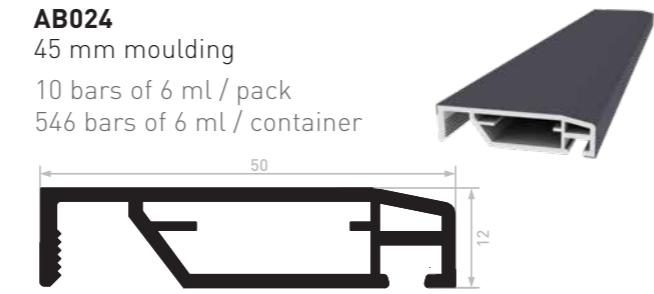


AB025

70 mm moulding
10 bars of 6 ml / pack
336 bars of 6 ml / container

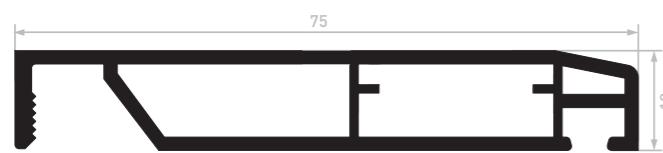

ANGLE COVER

COLORS MASS COLOURED



PIM013D
Angle cover for AB025
100 parts / bag



PIM015
Angle cover for AB024
200 parts / bag



PIM016
Angle cover for AB023
200 parts / bag



Profiles for classic renovation

On request, a protective film can be applied to skirting boards, angles and flats.

NEW

2.4 MM FLAPS SERRATED AND PLAXED

CB2401CF_AL

ALU flap 100x100x2.4 /Serrated, film coated

3 bars of 6 ml / pack

also available to order by the bar.



*CB2401C

Flap 100x100x2.4 /Serrated

5 bars of 6 ml / pack



*Geplast declines all responsibility for this plaxed PVC skirting board in the event of deformation due to sunlight.

COLORS PLAXED



90+ plated film decors available on request

ALU FLAP - THICKNESS 2.5 MM

CB2302_AL

Flap 100 x 100 x 2-2.5
AR/Serrated Alu

3 bars of 6 ml / pack

150 bars of 6 ml / container


LACQUERED COLOR



PLAXED



80+ plated film decors available on request



PVC FLAP - THICKNESS 2.4 MM


CB2401C

Flap 100 x 100 x 2.4/45°
DR/Serrated

5 bars of 6 ml / pack

200 bars of 6 ml / container

COLORS MASS COLOURED




> PVC FLAP - THICKNESS 2.5 MM

CB2501

Flap 100 x 100 x 2.5/45°
DR


5 bars of 6 ml / pack
250 bars of 6 ml / container



CB2501CS

Flap 100 x 100 x 2.5/45°
DR/Serrated breakable

10 bars of 6 ml / pack
250 bars of 6 ml / container



COLORS MASS COLOURED




White Beige Mouse
grey

CB2502CS

Flap 100 x 100 x 2.5/45°
AR/Serrated breakable


5 bars of 6 ml / pack
250 bars of 6 ml / container



CB2512

Flap 100 x 100 x 2.5/45°
AR

5 bars of 6 ml / pack
250 bars of 6 ml / container



> PVC FLAP - THICKNESS 2.7 MM

COLORS MASS COLOURED




White Beige Mouse
grey

CB2701

Flap 100 x 100 x 2.7/45°
DR


5 bars of 6 ml / pack
200 bars of 6 ml / container



CB2701C

Flap 100 x 100 x 2.7/45°
DR/Serrated


5 bars of 6 ml / pack
250 bars of 6 ml / container



CB2701CS

Flap 100 x 100 x 2.7/45°
DR/Serrated breakable


5 bars of 6 ml / pack
250 bars of 6 ml / container



CB2702

Flap 100 x 100 x 2.7/45°
AR


5 bars of 6 ml / pack
250 bars of 6 ml / container



CB2702CS

Flap 100 x 100 x 2.7/45°
DR/Serrated breakable


5 bars of 6 ml / pack
250 bars of 6 ml / container



CB2504

Flap 110 x 100 x 2.5
AR-2 Walls


5 bars of 6 ml / pack
170 bars of 6 ml / container



CB2511

Flap 100 x 100 x 2.5/45°
AR/Serrated


5 bars of 6 ml / pack
250 bars of 6 ml / container



COLORS MASS COLOURED



White



Grey
anthracite Golden
Oak

80+ plated film decors
available upon request

> PVC FLAP - THICKNESS 3 MM

COLORS MASS COLOURED





White Beige Mouse
grey

CB3001

Flap 100 x 100 x 3/45° DR

5 bars of 6 ml / pack
200 bars of 6 ml / container



CB2301


Flap 100 x 100 x 3-2/45° DR

5 bars of 6 ml / pack
250 bars of 6 ml / container

CB3011


Flap 100 x 100 x 3/45°
AR/Serrated

5 bars of 6 ml / pack
200 bars of 6 ml / container




NEW


► CORNER ANGLES - THICKNESS 2,4 MM, PLAXED




CE2472C Angle section 40X20X2,4 Serrated
20 bars of 6 ml / pack
600 bars of 6 ml / container
Also available to order by the bar.



CE2421C Angle section 100X60X2,4 Serrated
5 bars of 6 ml / pack
350 bars of 6 ml / container
Also available to order by the bar.



CE2420C Angle section 100X100X2,4 Serrated
5 bars of 6 ml / pack
250 bars of 6 ml / container
Also available to order by the bar.



CE2430C Angle section 60x40x2,4 Serrated
10 bars of 6 ml / pack
500 bars of 6 ml / container
Also available to order by the bar.


COLORS PLAXED




80+ plated film decors available on request

► PVC CORNER ANGLES - THICKNESS 2,4 MM

COLORS MASS COLOURED



White Beige Mouse grey

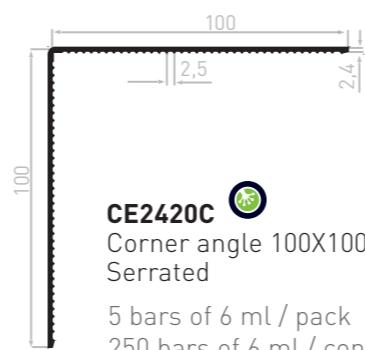


CE2420C Corner angle 100X100X2,4 Serrated

5 bars of 6 ml / pack
250 bars of 6 ml / container



CE2421C Corner angle 100X60X2,4 Serrated

5 bars of 6 ml / pack
350 bars of 6 ml / container



CE2430C Corner angle 60X40X2,4 Serrated

10 bars of 6 ml / pack
600 bars of 6 ml / container

► PVC CORNER ANGLES - THICKNESS 2,5 MM

COLORS MASS COLOURED



White Beige Mouse grey




CE2520C Corner angle 100X100X2,5 Serrated

5 bars of 6 ml / pack
250 bars of 6 ml / container



CE2520CS Corner angle 100X100X2,5-2 Serrated breakable

5 bars of 6 ml / pack
250 bars of 6 ml / container




CE2530C Corner angle 60X40X2,5 Serrated

10 bars of 6 ml / pack
600 bars of 6 ml / container

► ALU CORNER ANGLES - THICKNESS 2,5 MM



CE2520C_AL Corner angle 100 x 100 x 2.5-2 Alu Serrated
3 bars of 6 ml / pack




CE2530C_AL Corner angle 60 x 40x2.5-2 Alu Serrated
5 bars of 6 ml / pack

LACQUERED COLOR



White

PLAXED



Grey anthracite Golden Oak

80+ plated film decors available upon request

► PVC CORNER ANGLES - THICKNESS 2 MM




CE2045 Corner angle 60 x 50 x 2 Breakable
10 bars of 6 ml / pack
640 bars of 6 ml / container

COLORS MASS COLOURED



White



CE2041 Corner angle 60X40X2
15 bars of 6 ml / pack
600 bars of 6 ml / container

COLORS MASS COLOURED



White

Beige

Mouse grey

COLORS MASS COLOURED



White

PLAXED




Grey anthracite

Golden Oak

80+ plated film decors available upon request



CE2520 Corner angle 100X100X2,5
5 bars of 6 ml / pack
250 bars of 6 ml / container

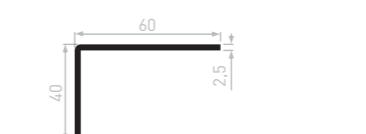


CE2530 Corner angle 60X40X2,5
10 bars of 6 ml / pack
500 bars of 6 ml / container




CE2521 Corner angle 100X60X2,5
5 bars of 6 ml / pack
300 bars of 6 ml / container

> PVC ANGLE SECTIONS - THICKNESS 2,7 MM




CE2720CS

Corner angle 100X100X2,7
Serrated Breakable
5 bars of 6 ml / pack
250 bars of 6 ml / container




CE2721C

Corner angle 100X60X2,7
Serrated
10 bars of 6 ml / pack
350 bars of 6 ml / container

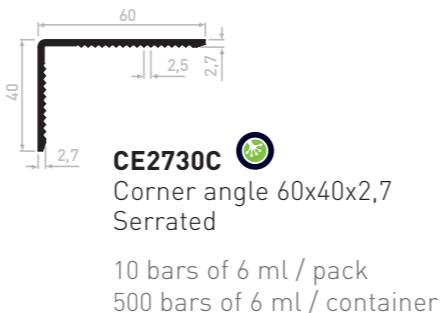

CE2730C

Corner angle 60x40x2,7
Serrated
10 bars of 6 ml / pack
500 bars of 6 ml / container

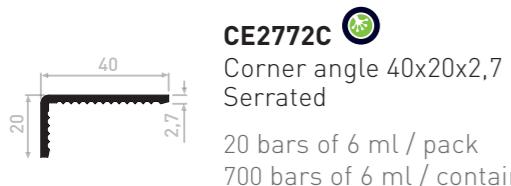

CE2772C

Corner angle 40x20x2,7
Serrated
20 bars of 6 ml / pack
700 bars of 6 ml / container

COLORIS TEINTÉS MASSE




Blanc Beige Gris souris

> PVC ANGLE SECTIONS - THICKNESS 3 MM

CE3020

Corner angle 100X100X3
5 bars of 6 ml / pack
200 bars of 6 ml / container



CE3015

Corner angle 123X83X3
5 bars of 6 ml / pack
200 bars of 6 ml / container



CE3030

Corner angle 60X40X3
10 bars of 6 ml / pack
400 bars of 6 ml / container



COLORS MASS COLOURED



White Beige Mouse grey

> FLAT PROFILES THICKNESS 2.4 MM SERRATED

PL2415C

Flat profile 100X2,4 Serrated
10 bars of 6 ml / pack
600 bars of 6 ml / container



PL2435C

Flat profile 50X2,4 Serrated
20 bars of 6 ml / pack
600 bars of 6 ml / container



PL2445C

Flat profile 30X2,4 Serrated
20 bars of 6 ml / pack
600 bars of 6 ml / container



COLORS MASS COLOURED



White Beige Mouse grey

> FLAT SECTIONS THICKNESS 2 MM DIVISIBLE

PL2015S

Flat section 100X2 Breakable
10 bars of 6 ml / pack
400 bars of 6 ml / container



COLORS MASS COLOURED



Blanc

> FLAT PROFILES THICKNESS 2.5 MM TOOTHED

PL2505D

Plat 200X2,5 Dentelé
5 bars of 6 ml / pack



Also available to order by the bar.

PL2515D

Flat 100X2,5 Toothed
10 bars of 6 ml / pack
450 bars of 6 ml / container



Also available to order by the bar.

PL2545D

Flat 30X2,5 Toothed
20 bars of 6 ml / pack
1 600 bars of 6 ml / container



Also available to order by the bar.

PL2535D

Flat 50X2,5 Toothed
20 bars of 6 ml / pack
1 000 bars of 6 ml / container



Also available to order by the bar.

COLORS MASS COLOURED



White Beige Mouse grey

COLORS PLAXED



80+ plated film decors available on request

This is only a partial list. To find out about all our flashings, corner angles and flat profiles, please contact our customer service department : commercial@geplast.fr


> PANEL - THICKNESS 24 MM

VB001

Triplewall panels 300 x 24
60 pitch



3 bars of 6 ml / pack
42 bars of 6 ml / container

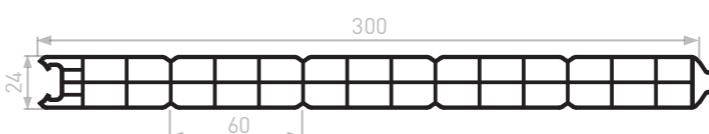

CERTIFIED
Thermal coefficient : 2.1 W/(m².K)
Acoustic coefficient : 26 dB

PANEL COLORS MASS COLOURED




White Beige Mouse grey

> PANEL - THICKNESS 28 MM

VB008
Triple-cell panel 300 x 28
60 pitch

3 bars of 6 ml / pack
36 bars of 6 ml / container

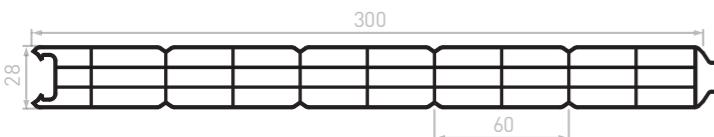

RF020
Galva stiffener for VB008
27,75X7

10 bars of 6 ml / pack





CERTIFIED

Thermal coefficient: 1.647 W/(m².K)

> TAPPED INSERTS



The entire tapped program is certified by CSTB QB59.

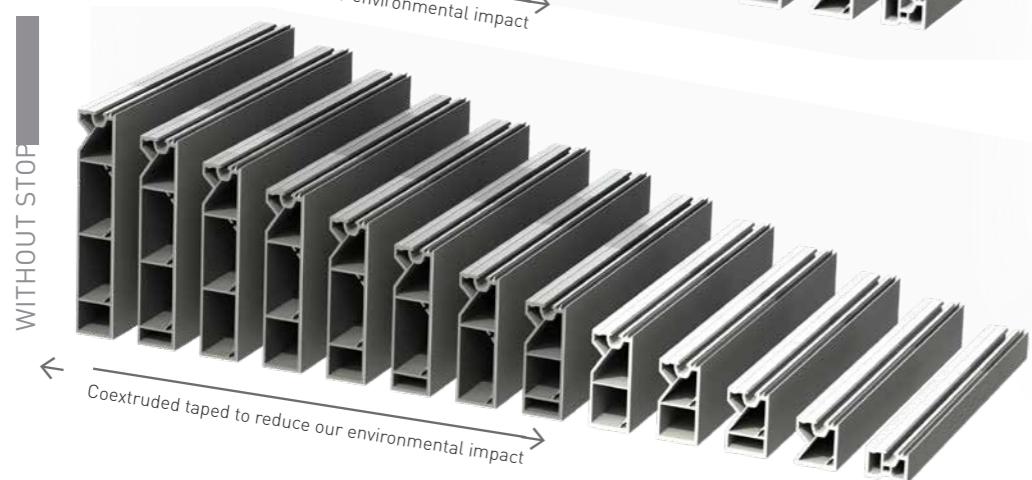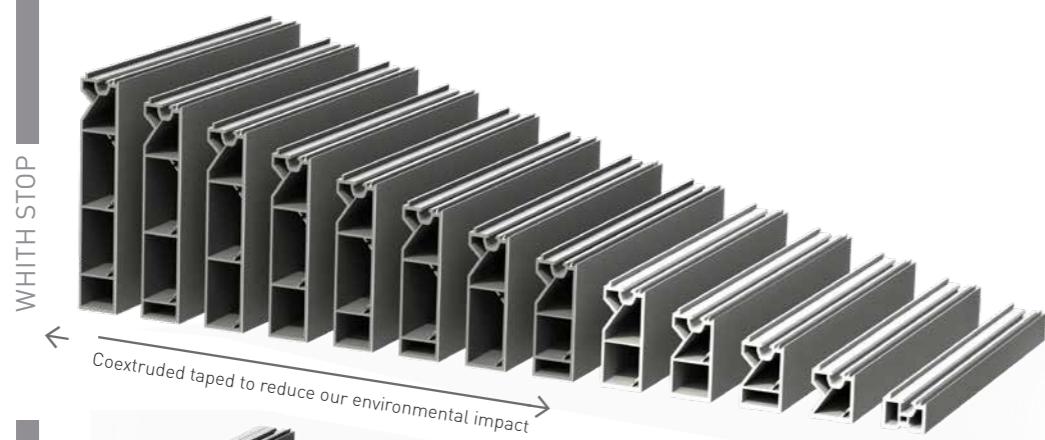

SEALING PLATES FOR INSERTS

Roll of 200 units



COLORS
SEALING PLATES FOR INSERTS



White

Black

All references are available by the bar (except white)

ME050JC **ME050D JC** **AC104**



17 mm tapped - coextruded seal
10 bars of 6 ml / pack
390 bars of 6 ml / container

ME021JC **ME021D JC**



27 mm tapped - coextruded seal
5 bars of 6 ml / pack
330 bars of 6 ml / container

ME022JC **ME022D JC** **AC106**



37 mm tapped - coextruded seal
5 bars of 6 ml / pack
240 bars of 6 ml / container

ME023JCF **ME023D JCF** **AC107**




47 mm tapped - coextruded seal
5 bars of 6 ml / pack
200 bars of 6 ml / container

ME024JCF **ME024D JCF**



57 mm tapped - coextruded seal
5 bars of 6 ml / pack
170 bars of 6 ml / container

AC108




ME025JCF **ME025D JCF**



Tapped 67 mm - coex + coextruded seal
5 bars of 6 ml / pack
150 bars of 6 ml / container

AC109



ME026JCF




ME026D JCF



Tapped 77 mm - coex + coextruded seal

3 bars of 6 ml / pack
120 bars of 6 ml / container

AC110



ME027JCF




ME027D JCF




Tapped 87 mm - coex + coextruded seal



3 bars of 6 ml / pack
110 bars of 6 ml / container

AC111




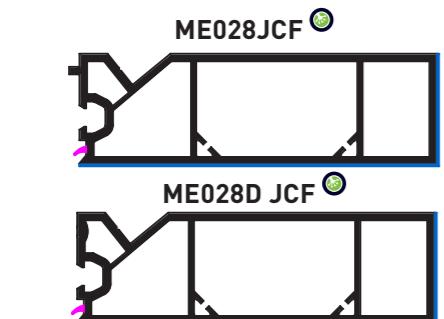

Tapped 97 mm - coex + coextruded seal
3 bars of 6 ml / pack
100 bars of 6 ml / container

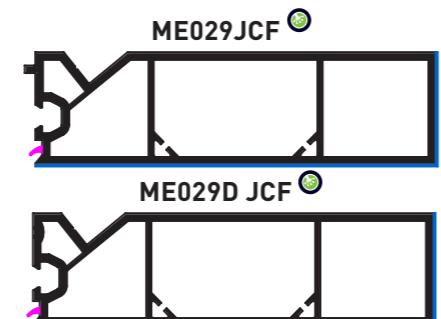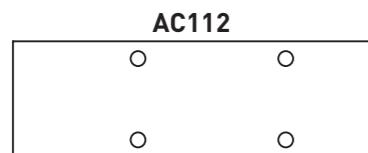

Tapped 107 mm - coex + coextruded seal
3 bars of 6 ml / pack
90 bars of 6 ml / container

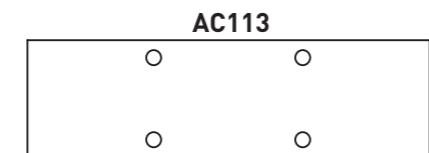


TAPPED INSERTS COLORS MASS COLOURED





PLAXED





80+ plated film decors available on request

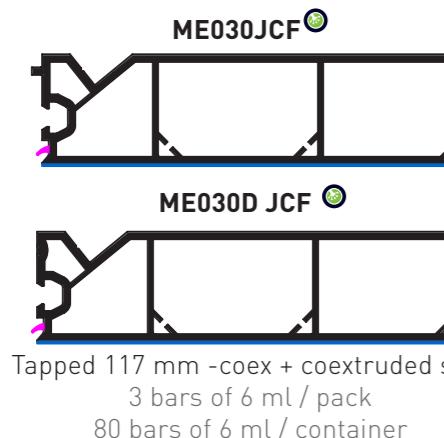


Tapped 117 mm - coex + coextruded seal
3 bars of 6 ml / pack
80 bars of 6 ml / container

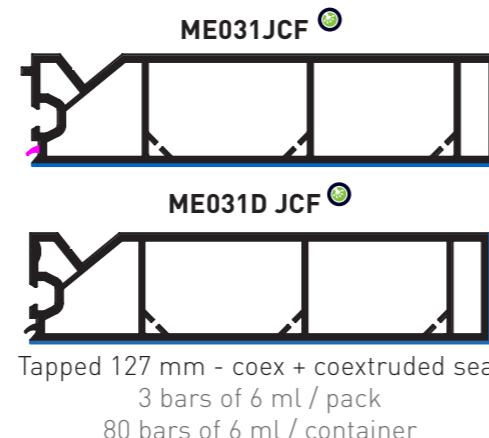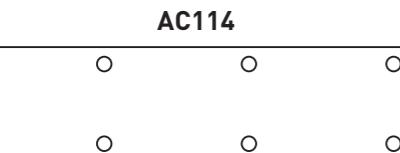

Tapped 127 mm - coex + coextruded seal
3 bars of 6 ml / pack
80 bars of 6 ml / container

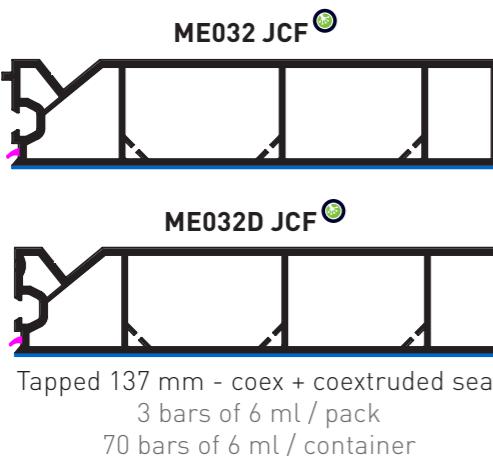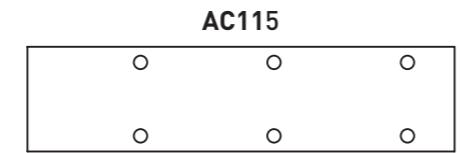

Tapped 137 mm - coex + coextruded seal
3 bars of 6 ml / pack
70 bars of 6 ml / container

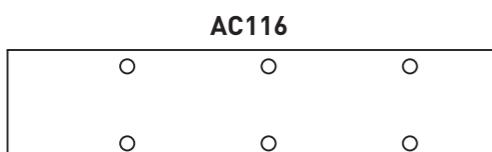


IMPLEMENTATION

BLOCK SCREW - PAC036

SPK/5-48/GS - 4 x 10


1 000 pieces / box

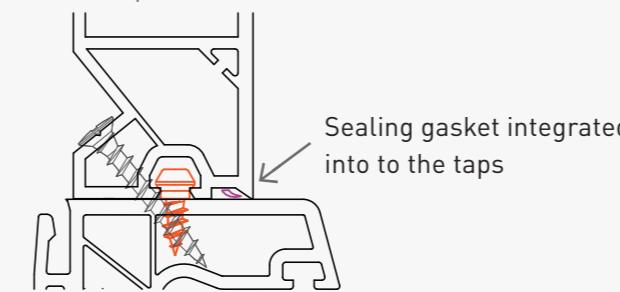

SCREW - PAC037

SPT/24-4,3 x 30 GS

1 000 pieces / box

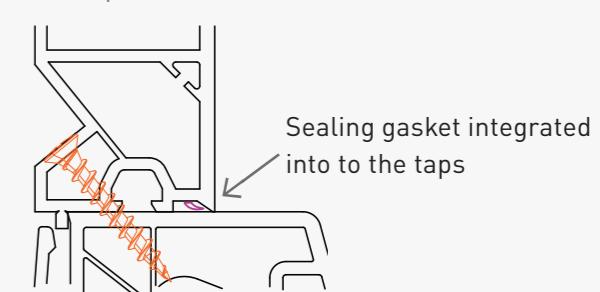

THEY ARE ALWAYS AVAILABLE ON OFFER SEALING PLATES

AC009

for ME050JC, ME021JC, ME022JC ME023JCF and ME024JCF

Rolls 291 pieces / package - white

Rolls 277 pieces / package - black




1 adhesive side

AC018

for ME025JCF, ME026JCF, ME027JCF, ME028JCF, ME029JCF, ME030JCF, ME031JCF and ME032JCF

Rolls 291 pieces / package - white

Rolls 277 pieces / package - black



1 adhesive side

> TAPPED

ME080

Tapped 165X24

3 bars of 6 ml / pack
84 bars of 6 ml / container



CONFIGURATIONS

Examples of possible edgings of the tapped **ME080**.



> GLAZING BARS

COLORS MASS COLOURED



PLAXED




+ other colors on request

NEW

ME073B


Glazin bars 28X7 +
2 adhesive strips 6 mm
20 bars of 6 ml / pack



Plaxed : also available by the bar


ME071B

Glazin bars 28X8,5 +
adhesive strips 6 mm
20 bars of 6 ml / pack



ME072B


Glazin bars 28X9 +
adhesive strips 6 mm
20 bars of 6 ml / pack



> DRAINAGE CHANNELS

ME060

Ogee drainage channel clip-on
30 bars of 6 ml / pack
600 bars of 6 ml / container

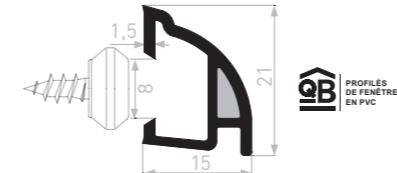

COLORS MASS COLOURED



PLAXED




+ other colors on request

PIM002

Drainage channel end plate for ME060
500 pairs tied or separated / bag



COLORS MASS COLOURED



+ other colours on request

SCREW FASTENING


The **ME060** drainage channel is fastened using an SFS block screw, reference: SPF/5-84/GS

CERTIFICATE (NF)126

To receive the NF certificate for the **ME060** profile, please contact our customer service department :
commercial@geplast.fr

ME061A*

Door sill drainage channel + adhesive strip 6 mm



COLORS MASS COLOURED



*Minimum order required 600 ml

> CONNECTING PROFILES


*Minimum order required 600 ml

COLORS MASS COLOURED



ME065

Connecting profile 60 mm
10 bars of 6 ml / pack



ME069

Connecting profile 70 mm
10 bars of 6 ml / pack



ME068

Connecting profile 71 mm
10 bars of 6 ml / pack




JOINT COVER

*Minimum order required 720 ml

ME066A*

joint cover 27 mm + adhesive strip 9 mm
30 bars of 6 ml / pack
800 bars of 6 ml / container



COLORS MASS COLOURED




White

COMPENSATION BLOCKS

*Recycled or mass-dyed materials


ME087B

Compensation blocks 27X18
+ 2 adhesives strips 12 mm
20 bars of 6 ml / pack
540 bars of 6 ml / container

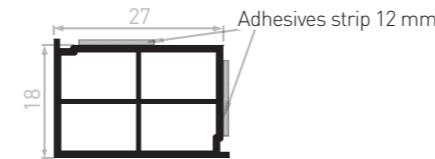

ME085A

Compensation blocks 25 x 15
+ adhesive strips 19 mm
20 bars of 6 ml / pack
700 bars of 6 ml / container



ME089*

Filler tube 25 x 15
20 bars of 6 ml / pack
900 bars of 6 ml / container




TRIM MOULDINGS

AB001


Window trim

10 bars of 6 ml / pack
10 bars of 6 ml / pack

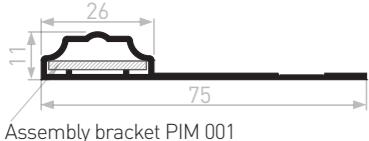

AB004A


Glued moulded trim
+ adhesive strip 6 mm
10 bars of 6 ml / pack
10 bars of 6 ml / pack
400 bars of 6 ml / container

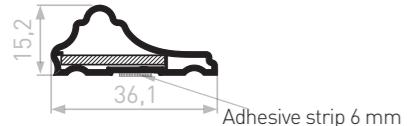

AB003

Moulded window trim


10 bars of 6 ml / pack
10 bars of 6 ml / pack

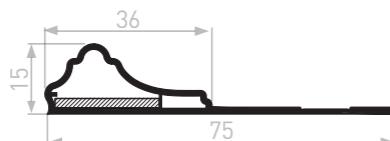


AB008

Moulded trim


10 bars of 6 ml / pack
500 bars of 6 ml / pack



COLORS MASS COLOURED



PLAXED



+ other colors
on request

AB021

Trim moulding for 13 mm flange
compatible with VEKA

10 bars of 6 ml / pack
500 bars of 6 ml / pack



DI016*

Support wedge 50 x 17

10 bars of 6 ml / pack
400 bars of 6 ml / container



DI035*

Support wedge 36x17
10 bars of 6 ml / pack
400 bars of 6 ml / container



COLORS MASS COLOURED




White

COLORS MASS COLOURED




PLAXED



+ other colors
on request


ME086A

Compensation blocks 15X8
+ adhesive strips 9 mm
20 bars of 6 ml / pack
700 bars of 6 ml / container



ME088A

Compensation blocks 18X10
+ adhesive strips 12 mm
700 bars of 6 ml / pack



COLORS MASS COLOURED



White

STIFFENERS

DI018/A*

Flat section 50 x 5
+ adhesive strip 19 mm (option)

10 bars of 6 ml / pack



DI019/A*

Flat section 23 x 6 + adhesive
strip 9 mm (option)

20 bars of 6 ml / pack



DI023

Flat section 23 x 8
15 bars of 6 ml / pack



ANGLE COVER

PIM011

Angle cover for AB021

200 parts / bag



COLORS MASS COLOURED




› TRANSPORT BLOCKS

DI010

Transport block 37X49-PL
250 mm clip-on


100 units / pallet

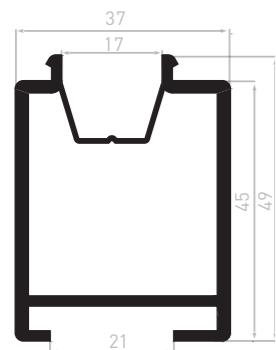

DI031

15 mm groove clip-on
Available lengths:
200 - 250 mm


2 500 units / pallet



DI032

32 mm groove clip-on
Available lengths :
200 - 250 mm


2 500 units / pallet



DI001/A

Transport block 30,5X22
Available lengths :
120 mm - 200 mm - 250 mm
+ adhesive strip 6 mm (option)


20 bars of 6 ml / pack
according to length



DI004

Transport block 21x11
Available lengths:
125 mm - 250 mm
335 mm - 500 mm


20 bars of 6 ml / pack
according to length



DI013A

Protective block 40X22
Available lengths :
200 mm - 250 mm
+ adhesive strip 6 mm


20 bars of 6 ml / pack
according to length



DI027A

Transport block 54X26
Available lengths :
200 mm - 250 mm
+ adhesive strip 6 mm


20 bars of 6 ml / pack
according to length

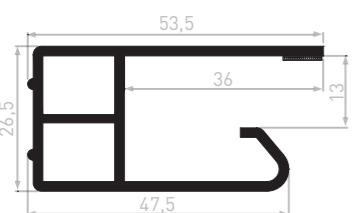

DI028A

Transport block 32X26
Available lengths:
125 mm - 200 mm - 250 mm - 300 mm
+ 2 adhesives strip 6 mm

20 bars of 6 ml / pack
according to length



› STORAGE POSTS



Ideal for the storage of small profiles in your workshops, their multiple dimensions make them a particularly suitable tool for daily use, especially during inventories.

- Responsible purchasing
- From recycling
- Space optimization

CL095 POST DE 90X40 MM

5 bars of 6 ml / pack
84 bars of 6 ml / container



CL096 POST DE 90X90 MM

2 bars of 6 ml / pack
42 bars of 6 ml / container



CL097 POST DE 120X120 MM

2 bars of 6 ml / pack
20 bars of 6 ml / container



CL127 POST DE 165X165 MM

1 bars of 6 ml / pack
12 bars of 6 ml / container



CL057 POST DE 200X200 MM

1 bars of 6 ml / pack
6 bars of 6 ml / container
30 bars of 6 ml / pallet pallet (for orders over 180 bars)



“FLOREAL” COLORS

The “Floreal” comes from the recycling of unused resources in production, the storage posts can take different shades.



GEPLAST

The future takes shape together

GENERAL TERMS & CONDITIONS OF SALE

These General Terms & Conditions of Sale can also be viewed on the Internet site www.geplast.fr

I – SCOPE OF APPLICATION

Sales by the company GEPLAST (hereinafter 'our Company' or 'us') are subject to these general terms & conditions, which the customer undertakes to fulfil unreservedly and which take precedence over any purchasing condition and any contrary clause stated in the customer's documents, unless formally and expressly waived by us.

No delay or omission by us at any given time in exercising any of these conditions may be interpreted as a waiver to us imposing the aforesaid condition. If one of the conditions specified herein were to be cancelled or rendered unenforceable upon the customer, in whole or in part, the customer would remain bound by all the other conditions.

II – FORMATION OF THE CONTRACT

Any order received from the customer, whether a proposal or a quotation issued by our company, must be the subject of an order confirmation from us, materialized by the dispatch to the customer of an acknowledgement of receipt of order (or 'ARC'). If no reservation is received from the customer within 48 working hours of the dispatch of this order confirmation (ARC), the order is deemed to have been accepted, firm and definitive. The order is then irrevocable, and production begins. This order confirmation (ARC) is binding for both us and the customer, and is authoritative in the event of any subsequent dispute. Only the order confirmation (ARC) accepted by both parties may deviate from these general terms and conditions. In the event of contradiction with the order confirmation (ARC), only the latter shall prevail.

Our plans, drawings, studies, photos, brochures, catalogs, etc., remain our entire property.

III – DELIVERY – LEAD TIMES

Unless otherwise stated in our order confirmation, delivery lead times are for guidance only and are not guaranteed. Neither compensation nor contract cancellation shall be granted in the event of delay.

However, in the event of a delay exceeding 8 weeks beyond the guide delivery date, not attributable to a *force majeure* event, the customer may ask to cancel the sale, without penalty to either party, after serving notice without effect. Deposits paid shall be returned to the customer within eight days.

The customer accepts that the products ordered should be delivered in full, or only partially subject to having been duly notified in advance.

In any event, the order can only be fulfilled if the customer is up-to-date with its obligations towards our Company.

IV – DELIVERY – TRANSFER OF RISKS – RETURNS

The delivery of our goods and their packaging materials is considered to take place in our warehouses. Risks are transferred to the customer once the goods are collected.

The customer has a time limit of 10 days after the goods are made available to be taken into the customer's possession. Beyond this deadline, the risks will be transferred to the customer, who will be liable to pay penalty storage fees equivalent to 1% of the price of the goods, per day of delay, without prejudice to other justified damages and interest.

Upon receipt, the customer or its representative is required to check the goods delivered against the order and to verify their condition.

Our Company waives all liability for errors in quantity, visible damage or defects observed after the delivery note and/or consignment note has been signed.

Defects in part of the delivery are not grounds to reject it in full.

Other than for errors compared to the order or acknowledged defects, the products may not be taken back. No product may be sent back without our prior written consent and our return shipping instructions.

For profiles delivered in metal containers, it should be noted that the containers remain the non-transferable property of our Company and must be returned to us. If not returned, the customer will be invoiced for the cost of the containers (€350 ex VAT each).

V – TRANSPORT

Unless otherwise agreed, the customer is responsible for transport of the goods.

If we provide the transport or assign it to a third-party carrier, it is expressly agreed that this is at the customer's request and risk, including when the price is specified as 'free delivery'. It is therefore the customer's responsibility to take any necessary measures in the event of damaged or missing items, in accordance with the

provisions of articles L. 133-3 *et sequor* of the French Commercial Code.

Unless formally and expressly waived by us, no clause may be considered as waiving the aforementioned rules.

VI – GUARANTEE – LIABILITY

In accordance with articles 1641 *et sequor* of the French Civil Code, our products carry the legal guarantee for hidden defects, as well as for visible defects as soon as, in the latter case, these visible defects have been reported by the customer or its representative upon receipt.

For third-party products incorporated into our own products, our Company can agree no greater guarantee than that due from and granted by the suppliers and manufacturers of the aforesaid third-party products.

In all cases, if the non-compliance or defect is acknowledged, our Company's liability shall be limited, at our discretion, either to exchanging or repairing the non-compliant or faulty product or component, or to refunding the order, to the exclusion of any compensation or damages, for any reason whatsoever, particularly for the costs of labor, dismantling, refitting, immobilization or transport, etc.

The guarantee does not apply when the conditions of storage or installation do not follow best practice, or are inappropriate or contrary to our guidelines, in the event of negligence, incorrect cleaning and inappropriate or non-compliant use of our products.

VII – PRICE – PAYMENT TERMS

Our prices are listed excluding VAT and excluding packaging, and our goods are always invoiced at the price in force on the day of the order confirmation (ARC); VAT is added at the rate in force on the invoice date. Payment costs such as transfer fees, conversion fees, customs fees, etc. are to be paid by the customer

Invoices are payable to our head office 30 days net of shipping, unless otherwise expressly agreed by us. If an order is fulfilled in several deliveries, the invoices relating to each delivery are payable as they are issued without waiting for the entire order to be fulfilled.

In addition, in accordance with the provisions of article L. 441-10 of the French Commercial Code, any delay in payment or any extension of the deadline entails *ipso jure* the application of late-payment interest calculated *prorata*, equal to the interest rate applied by the European Central Bank to its most recent refinancing operation increased by 10 percentage points.

Furthermore, any delay in payment not authorized by our Company results in liability, under a penalty clause for late payment, for fixed compensation set at 10% of the price, as well as payment of the fixed debt recovery allowance of €40 specified in article L. 441-10 of the French Commercial Code, which may be increased by the actually recovery expenses incurred (if greater than the fixed fee).

VIII – OUTSTANDING PAYMENTS – DEFEASANCE CLAUSE

In the event of failure to pay, forty-eight hours after serving notice without effect, the sale will be cancelled *ipso jure* if we so wish and our Company may seek to have the products returned, without prejudice to any other damages. Cancellation will affect not only the order in question but also all prior unpaid orders, whether they have been or are being delivered and whether or not payment is outstanding.

For payment by bill of exchange, failure to return the bill will be considered as a dishonored bill, comparable to a default of payment. Similarly, when payment is staggered, failure to pay a single instalment will result in immediate liability for the whole debt without notice being served.

In all the above cases, the sums that would be due for other deliveries or for any other reason will immediately become due if our Company does not opt to cancel the corresponding orders. Our Company may also, if it wishes, suspend fulfilment of any current order.

IX – DETERIORATION IN THE CUSTOMER'S SOLVENCY OR FINANCIAL POSITION

If the customer's solvency or financial position deteriorates, we may, at our discretion, either cancel the order or demand payment or demand additional guarantees. In the event that joint proceedings are taken against the purchaser, we will be able to cancel the order insofar as this is permitted by local law applicable to these proceedings.

X – FORCE MAJEURE – UNFORESEEN EVENTS

Any *force majeure* event will result *ipso jure* in suspension of deadlines for fulfilling our commitments and will give us the option, as applicable, to cancel them.

Under no circumstances may we be held liable if a *force majeure* event makes it impossible for us to deliver or fulfil the order.

Force majeure, in particular as understood in relation to these terms & conditions,



GEPLAST

These General Terms & Conditions of Sale can also be viewed on the Internet site www.geplast.fr

The future takes shape together

include but are not limited to: pandemic, war, mobilization, general or partial strike, lock-out, delay by our suppliers, machine failure, procurement problems for raw

materials, components, equipment or power, fire or any other event over which we have no control, such as to prevent or reduce manufacturing or deliveries.

In the event of a significant modification to the economic conditions in force when we accepted an order, such as to make fulfilment excessively costly for us (particularly the price of the raw material), we reserve the right to negotiate the terms of this order and to cancel it if it is impossible to reach agreement.

XI – COMPLIANCE WITH OUR RECOMMENDATIONS

Correct use of the products sold by our Company requires our recommendations to be strictly followed, in particular for selection, storage, installation, use and cleaning as specified in our manuals, guides, specifications, catalogues, maintenance sheets and other technical documents.

These documents can be freely viewed on our internet site www.geplast.fr

These documents can also be handed to the customer on request.

The customer undertakes to bring them to the attention of intermediate and end users.

In any event, the customer undertakes not to make any use or take any action with the products sold without first inquiring about any recommendations regarding the aforesaid products. Failure to follow these recommendations rules out any replacement, repair, refund or compensation of any kind.

In particular, these recommendations include, but are not limited to, the following and are no substitute for carefully reading and closely following the technical documents relating to each product and, if in doubt, first referring back to our Company:

Confirm the compatibility and suitability of the products for the customer's needs

The customer has a duty to confirm the suitability of our products and their technical features for their needs, expectations and uses they plan to make of them.

In the event it is planned to use our products in combination or incorporated with other products for which we have not previously guaranteed compatibility, whether these products come from our Company or third-parties, it is the customer's responsibility first to ensure the suitability and compatibility of the products with each other and more generally the technical feasibility of operation under reasonable conditions.

Confirm the condition of the products before use and commissioning test

The products sold by our Company, whether made from synthetic material (e.g. PVC or ABS) or plant-based/hybrid material (e.g. the Loryza range), may have small manufacturing differences, particularly in their appearance (colour differences, material imperfections, etc.) and small differences in length.

If the products are intended for a specific use, the customer should first perform tests.

Storage and cleaning conditions for the products

Products must be stored and cleaned under normal and usual conditions ensuring they retain their structure, properties and appearance, in particular with regard to unforeseen climatic, atmospheric, temperature, light or other conditions, irrespective of their source, and in all cases complying with our specific recommendations, where they exist. In general, the products must be stored out of sunlight, bad weather and moisture.

In particular, for storage, the products should be stacked on a dry flat surface, in a cool and well-ventilated place, out of the light, so as not to be distorted or discolored.

Profiles made of 100% PVC should be cleaned using warm soapy water with a soft non-abrasive sponge and rinsed with clean water. No solvent, acid, acetone-based or chlorinated product should be used. For storage, cardboard kits such as packs should be laid on a dry flat surface, in a well-ventilated place, to avoid distortion.

XII – ADVERTISING RIGHT

Any use by the customer of one of our trademarks or company name will be subject to our prior written agreement.

XIII – PERSONAL DATA

In the context of contractual relations with the customer, our Company employs computerized systems making it easier to manage the customer's order, to meet legal or regulatory obligations and to send sales documents to the customer. Some of the data collected in this way, required to agree or fulfil the contract(s), may relate to one or more identified or identifiable natural persons acting in their professional capacity. In this case they meet the qualification for personal data in the meaning of current national and European regulations. Our Company is then considered as the Data Controller.

In doing so, our Company undertakes under all circumstances to comply with the regulations applicable to processing personal data, and particularly Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 applicable with effect from 25 May 2018 (hereinafter 'GDPR') and French law^{78- 17 of 6 January 1978} on data processing, files and freedoms.

Our Company also undertakes only to involve or work with contractors or partners that also comply with them.

In compliance with the regulations, these data are stored for the duration of the commercial relationship between our Company and the customer, then for a period of 3 years following its end, for statistical purposes, without prejudice to any legal or regulatory obligations for data archiving when they exist and storage made necessary to establish proof of a right or a contract that can be archived in accordance with the provisions of the French Commercial Code.

In any event, natural persons affected by processing of data about them have a right of access, rectification, erasure, restriction of processing, opposition or data portability, the right not to be affected by automated decision-making (including profiling) and a right of appeal to the CNIL (French data protection commission).

XIV – RETENTION OF OWNERSHIP

PRODUCTS SOLD REMAIN OUR PROPERTY UNTIL EFFECTIVE PAYMENT OF THE ENTIRE PRINCIPAL AND INCIDENTAL PRICE. IN THIS RESPECT, PROVIDING A BILL OF EXCHANGE OR ANY OTHER SECURITY CREATING AN OBLIGATION TO PAY DOES NOT CONSTITUTE PAYMENT IN THE MEANING OF THIS CLAUSE.

FAILURE TO PAY ANY OF THE INSTALMENTS MAY RESULT IN DEMANDS TO RETURN THE PRODUCTS.

CUSTOMER UNDERTAKES, UNTIL PAYMENT OF THE FULL PRICE AND SUBJECT TO AN IMMEDIATE DEMAND BY OUR COMPANY TO RETURN THE PRODUCTS, NOT TO TRANSFORM NOR INCORPORATE THE AFORESAID PRODUCTS, NOR TO RESELL THEM OR PAWN THEM.

IN ANY EVENT, THE PRODUCTS STILL IN THE CUSTOMER'S POSSESSION ARE CONSIDERED TO BE THOSE FOR WHICH PAYMENT IS OUTSTANDING.

THE CUSTOMER ALSO UNDERTAKES TO NOTIFY US IMMEDIATELY OF ITS SUSPENSION OF PAYMENTS, OR TO SUBMIT ITSELF OR BE SUBJECT TO JOINT PROCEEDINGS FOR RECEIVERSHIP OR COURT-SUPERVISED WINDING UP ON REPORT OF EXISTENCE IN ITS STOCK OF UNPAID GOODS BELONGING TO US AND TO SUPPLY US ANY INFORMATION ENABLING US TO DEMAND THE RETURN OF GOODS FROM SUBSEQUENT PURCHASERS.

THESE MEASURES ARE NO OBSTACLE TO TRANSFER TO THE CUSTOMER, AT DELIVERY, THE RISKS OF LOSS OR DAMAGE OF THE PRODUCTS SOLD, AS WELL AS DAMAGE THAT THEY COULD CAUSE.

XV – APPLICABLE LAW – SETTLEMENT OF DISPUTES

ALL DISPUTES RELATING TO OUR SALES AND TO FULFILMENT OR INTERPRETATION OF OUR GENERAL TERMS & CONDITIONS OF SALE ARE SUBJECT TO FRENCH LAW AND WILL BE SOLE JURISDICTION OF THE NANTES (FRANCE) COMMERCIAL COURT, EVEN FOR A GUARANTEE CLAIM OR WHERE THERE ARE MULTIPLE DEFENDANTS.

Date :

Last name, First name:

Signature preceded by the mention "Read and approved"

Note-taking

Note-taking



GO TO
WWW.GEPLAST.FR

GEPLAST SAS
Z.I. Actipôle Nord 249
6, rue de Beauséjour
Saint-André-de-la-Marche
49450 SÈVREMOINE
Phone : 02.41.49.80.90
Fax : 02.41.46.42.07

Non-contractual document. We reserve the right, at any time and in order to improve our profiles, to make any modifications we consider necessary.